




SCHNORR[®] Product range

EN


Disc springs
Bolt locking systems

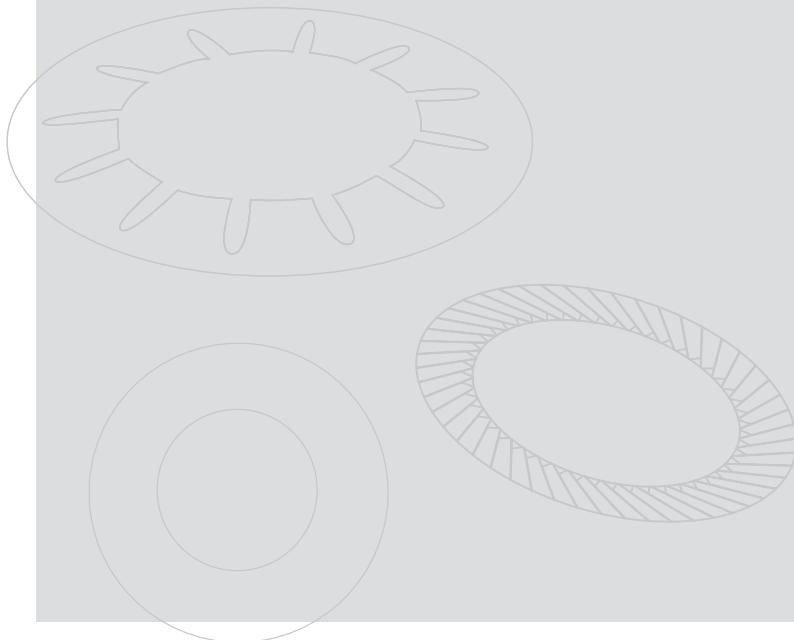

SCHNORR[®]
DISC SPRING ENGINEERING



SCHNORR®
DISC SPRING ENGINEERING

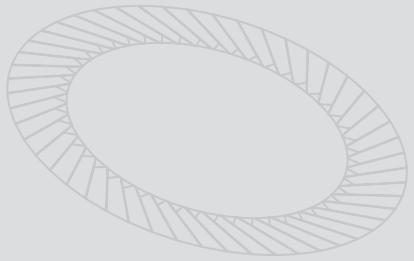

Acquired competence for highest precision.

As a pioneer of the disc spring application Adolf Schnorr founded the family-owned company in 1908. Today, after more than 100 years of company history, SGNORR has grown into a international leading problem solver in the field of disc springs and bolt locking systems and has a worldwide network of sales agencies.

In addition to the standard materials (C60S, C75S, 51CrV4) SGNORR warehouses a variety of other materials in order to produce on the specific requirements of our customers and to ensure a high flexibility in our production.

With the merger of the HUGO BAUER Nachf. GmbH and the ADOLF SCHNORR GmbH & Co KG to the SGNORR GmbH by August 1st 2011 additional resources were pooled and the range of parts, manufacturing technologies and production expertise was expanded.

Beside the longstanding experience in stamping and turning, the new company is now also equipped with the technology of fine-blanking, the expertise in manufacturing warp-critical disc springs and an additional product group - the wave spring as a drawing part.

Two strong brands under one roof means for customers and partners the availability of the full potential of two highly-performing companies with a single point of contact and thus the advantages of an even better knowledge and service.

SCHNORR® GmbH



Company information

worldwide sales network
History

Page 4
Page 5

Original SCHNORR® disc springs



SCHNORR® disc springs

Page 7

Disc spring dimension tables
standard materials (spring steel)
Material grade 1.4310 (X10 CrNi 18-8)
Material grade 1.4568 (X7 CrNiAl 17-7)

Page 11
Page 18
Page 21

SCHNORR® BEARING PRELOAD SPRINGS

Page 22

Bearing preload springs „K“ dimension tables
Bearing preload springs "K" (non-slotted springs)
Bearing preload springs "K" (slotted springs)

Page 23
Page 25

Original SCHNORR® bolt locking systems



SCHNORR® SAFETY WASHERS

Page 27

Safety washers dimension tables
Standard safety washers type "S"
Very strong safety washers type "VS"
Captive safety washers type "UV"

Page 29
Page 31
Page 32

SCHNORR® LOAD WASHERS

Page 32

Load washer dimension tables
Load washers according to DIN 6796
Original SCHNORR® HS-Washers

Page 34
Page 35

SCHNORR Engineering & technical information



SCHNORR Engineering

Page 37

Material types

Page 40

surface protection

Page 44

Tightening torques for Original SCHNORR® Safety Washers

Page 46

Disc spring enquiry sheet

Page 47

Facts and figures

workforce:

248 (by 31.12.2012)

production area:

approx. 5000 m²

Year of foundation:

1908

Headquarters:

**Stuttgarter Str. 37
71069 Sindelfingen-Maichingen
Germany**

Branch:

**Gottlieb-Daimler-Str. 9
78234 Engen-Welschingen
Germany**

worldwide sales network

7 foreign subsidiaries

- **SCHNORR Corporation** | Ann Arbor, MI, United States
- **SCHNORR GROUP MEXICO S.D.E R.L.DE C.V.** | Queretaro, Mexico
- **SCHNORR Shanghai Trading Co.,Ltd.** | Shanghai, China
- **SCHNORR Korea Co. Ltd** | Bisan-Dong, South Korea
- **SCHNORR Group France S.A.R.L.** | St Pierre du Perray, France
- **SCHNORR Italia s.r.l.** | Trezzano, Italy
- **SCHNORR Espana S.L.U.** | Figueras, Spain

further 28 foreign sales agencies worldwide

More information on our subsidiaries and sales agencies can be found on
www.schnorr.de



History

1908

Schnorr milestones

Adolf Schnorr founds a workshop for stamping tools near Stuttgart

1920's

Schnorr commences - as the first company ever - the industrial manufacturing of disc springs at the location near Stuttgart. Thus, Adolf Schnorr is considered as the pioneer of the disc spring.

1956

Move to a new site in Sindelfingen-Maichingen

1960's

Schnorr develops and launches the Original Schnorr® Safety Washers

1972

Creation of an international sales network including the foundation of Schnorr Corporation in the USA (Ann Arbor, MI)

1980

Foundation of Schnorr Italia near Milan

1995

HUGO BAUER NACHF. GmbH becomes member of the Schnorr Group

2005

Foundation of Schnorr Espana in Figueras

2006

Foundation of Schnorr Group France near Paris

2008

Foundation of the subsidiaries Schnorr Shanghai and Schnorr Group Mexico (Queretaro)

2010

Foundation of Schnorr Korea near Seoul

2011

„Two strong brands under one roof“ The Adolf Schnorr GmbH & Co. KG and the HUGI BAUER NACHF. GmbH merge to become Schnorr GmbH

2013

New sales structure. In order to take care of our customers more effectively we subdivided the Schnorr Sales structure into two divisions: Industrial and Automotive





We put things in motion
- or hold them securely.

For example, pressure-relief valve in pipelines.

References



Percussion drilling machine



Overload limitation




Machine tool



Spindle




Actuator

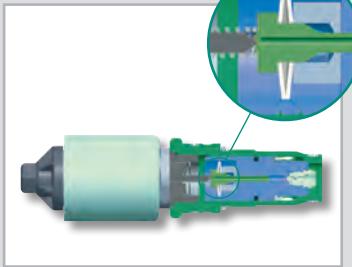

Control valve



Pipelines subject to pressure

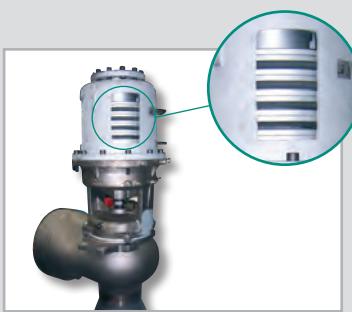

Pressure-relief valve

Managing maximum force using minimum space.

SCHNORR® disc springs support a lot of dynamic processes in a skillful, safe and efficient way – often under extreme force and load conditions.

With the demand to develop and manufacture perfectly fitting solutions for various applications, SCHNORR®, offer an extensive standard range of disc springs, together with a multitude of special sizes as well as customer-oriented solutions and special developments.

SCHNORR® disc springs excel by:

- An optionally linear, degressive or progressive course of the load deflection curve
- Long service life with dynamic load
- Use of high quality materials
- Precise adherence to force and dimension requirements

Original SCHNORR® disc springs

The characteristic benefits of original SCHNORR® disc springs include:

- ① Load deflection curves of straight, progressive or degressive character according to the selection of spring arrangement and dimension.
- ② Simple adjustment of the spring stack length by the addition or removal of individual springs, thus altering the spring stack characteristic.
- ③ Efficient use of space with high spring forces obtainable with small deflections.
- ④ Largely self damping, particularly with parallel stacking.
- ⑤ No setting or fatigue under normal loads load.
- ⑥ Long service life
- ⑦ Flexibility in application of the disc springs can lead to a reduction in stock levels.


By means of these characteristics, the original SCHNORR® disc spring has developed such a wealth of application areas that nowadays there is scarcely an engineering area where it is not used.



Effect of spring forces

The importance of disc springs on machines and control systems is very often underestimated. At the same time, any change to the behaviour of these components may give rise to a malfunction or even failure of entire facilities.

Classification of the various spring type is often carried out according to the kind of load. The disc spring has a special place in the range of springs commonly available. By changing its geometric parameters it is possible to provide individual springs with characteristic curves from linear to strongly degressive according to the application needs.

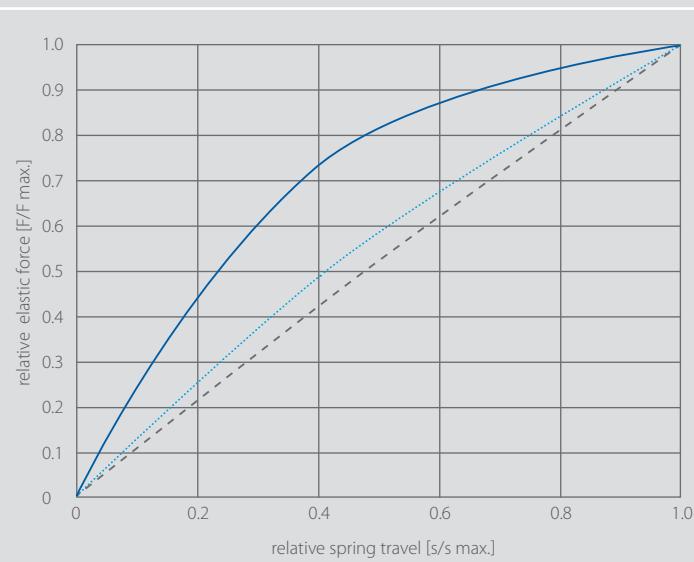

Characteristic curve shape – spring dimension


degressive	-63 x 31 x 1.8 · l _o = 4.15 mm
moderately degressive	-63 x 31 x 2.5 · l _o = 4.25 mm
linear	-63 x 31 x 3.5 · l _o = 4.90 mm

A key advantage of the disc spring is that it can raise a high elastic force with a small spring travel. That is why it is used very often to store potential energy. Apart from this virtual static use, it is also often used in dynamic applications.

When using disc springs under sinusoidal oscillating loads, fatigue strength and time yield diagrams are available in order to enable a safe design. Wherever possible the spring arrangement applied should achieve a fatigue life in excess of 2 million cycles. Fundamental to the successful application of a disc spring under these conditions is observing the minimum preload requirements and that the springs are correctly guided.

SCHNORR® fatigue life estimates are based on a sinusoidal load input. For applications where step input (i.e. impact) is seen SCHNORR® can advise on fatigue life according to application.

The conical shape of the disc spring allows single springs to be combined in different ways. As a result, the characteristic of a spring combination can be varied in almost any way desired. In principle the following possibilities exist. In spring columns with single springs stacked in series, the spring deflections add up with constant load (b). In spring columns with springs stacked in parallel, the forces add up at the same deflection (c). In spring columns with combinations of serial and parallel stacking, various characteristic curves can be realized (d).

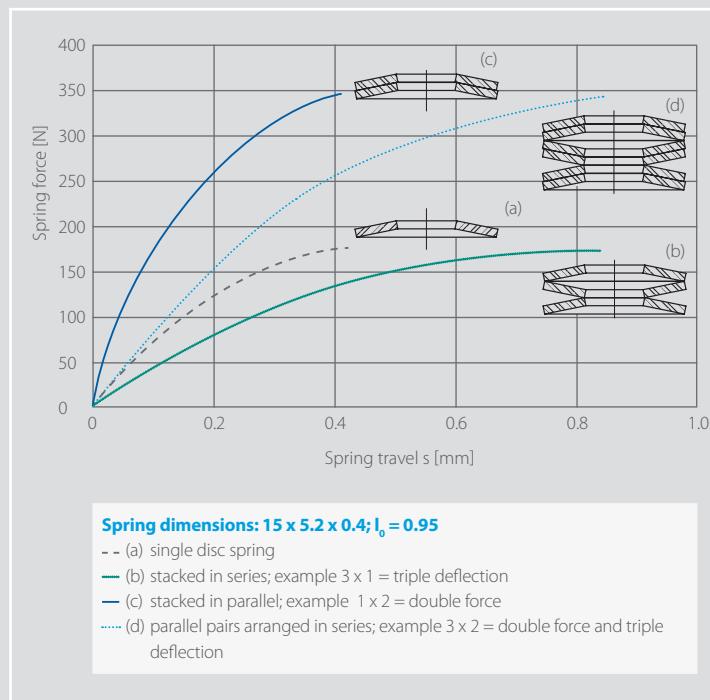

If disc springs of different thickness are stacked in a suitable way, then even progressive characteristic curves can be realized. For this, either several disc springs of different material thickness or identical disc springs with intermediate rings of different thickness or different layering types are used.

Due to this flexibility in the characteristic curve design, the disc spring can be used in a very wide spectrum.

Do you require assistance in specifying the correct disc spring either standard or special to your exact requirements?

Our engineering team will be pleased to help you in designing the most suitable disc spring solution according to your specifications.

The earlier we are involved in the development process, the better we can support you with our expertise.

What should one look for when selecting disc springs?

The price of incorrect selection with warranty claims and loss of reputation is very often more than the initial cost of a quality disc spring in the first place. In order to help you, we think the following are the most important criteria:

- ① Does the manufactured version comply with the quality requirements? On pages 8 and 9 you will find various manufacturing processes. One should pay attention to using a quality which complies with the requirements. We would be glad to advise you on the correct selection.
- ② Is the disc spring preset? Some suppliers in the low-price segment try to save this step. As a result, the disc spring will take a set after the first load.
- ③ Was a suitable material selected? In case of high temperatures or hostile environment, special materials need to be specified (see page 41).
- ④ Was a suitable surface treatment selected for corrosion protection (see page 44)?

Should individual consulting and design be carried out? We would be glad to support you with our experience and know-how.

V-Card Schnorr



Original SCHNORR® disc springs

Today DIN EN 16983 (previously DIN 2093) divides three manufacturing methods depending on the relevant thickness:

Group 1: $t < 1,25$, punching, cold forming, rounding-off edges

Group 2: $1,25 \leq t \leq 6$ mm, punching, cold forming, turning and rounding off edges or fine-blanking, cold forming and rounding off edge

Group 3: $> 6 < t \leq 14$ mm, cold or hot forming, turning all sides, rounding off edges or punching, cold forming, turning and rounding off edges or fine-blanking, cold forming, rounding off edges.

Notes on the disc spring table

The following tables, list the springs according to DIN EN 16983 (previously DIN 2093) as well as those to SCHNORR® Internal standards. Sizes according to DIN EN 16983 (previously DIN 2093) are shown in heavy type. The prefix A, B or C shows the corresponding series. All sizes listed are in production and normally available from stock. The Article number quoted is the normal manufacture from spring steel with phosphate finish.

The load and the corresponding stresses are given for the three points $s = 0,25 h_o$, $s = 0,5 h_o$, $s = 0,75 h_o$. From $s > 0,75 h_o$, the actual characteristic curve increases progressively, contrary to the calculation (the table contains calculated values).

Disc springs according to group 3 are provided with turned bearing surfaces and reduced disc thickness. The disc's force increased by the bearing surfaces which is compensated by means of the reduced disc thickness t' .

Disc thickness t' corresponds to the effective thickness of the spring and must be accounted for with parallel stacking for determining the column length. The elastic force applies to disc springs made of spring steel.

Dimensional series

Dimensional series	h_o/t
A	~ 0,40
B	~ 0,75
C	~ 1,30

The following tolerances apply to springs made of standard materials (C75S and 51CrV4) (Tolerances for springs made of corrosion-resistant materials according to factory standard):

Load tolerances

Nominal spring thickness		Admissible tolerances	
t or t' [mm]		F^* [%]	
greater than	up to	max.	min.
0,20	1,25	+25	-7,5
1,25	3,00	+15	-7,5
3,00	6,00	+10	-5,0
6,00	16,00	+5	-5,0

Allowances for the spring load with springs according to DIN EN 16983 (previously DIN 2093)

* F with test length $l_p = l_0 - 0,75 * h_0$

Diameter tolerances

Nominal dimension		Admissible tolerances			
D _e or D _i [mm]		D _e [mm]	D _i [mm]	concentricity [mm]	
greater	up to	max.	min.	max.	max.
3	6	0	-0,12	+0,12	0
6	10	0	-0,15	+0,15	0
10	18	0	-0,18	+0,18	0
18	30	0	-0,21	+0,21	0
30	50	0	-0,25	+0,25	0
50	80	0	-0,30	+0,30	0
80	120	0	-0,35	+0,35	0
120	180	0	-0,40	+0,40	0
180	250	0	-0,46	+0,46	0

Allowances for external and internal diameters and concentricity with springs according to DIN EN 16983 (previously DIN 2093)

Thickness tolerances

Nominal spring thickness		Admissible tolerances	
t or t' [mm]		t or t' [mm]	
greater than	up to	greater than	up to
0,20	0,60	+0,02	-0,06
0,60	1,25	+0,03	-0,09
1,25	3,80	+0,04	-0,12
3,80	6,00	+0,05	-0,15
6,00	16,00	+0,10	-0,10

Allowances for spring thickness with springs according to DIN EN 16983 (previously DIN 2093)

Overall height tolerances

Nominal spring thickness		Admissible tolerances	
t or t' [mm]		l_0 [mm]	
greater than	up to	max.	min.
0,20	1,25	+0,10	-0,05
1,25	2,00	+0,15	-0,08
2,00	3,00	+0,20	-0,10
3,00	6,00	+0,30	-0,15
6,00	16,00	+0,30	-0,30

Allowances for the overall height with springs according to DIN EN 16983 (previously DIN 2093)

Original SCHNORR® disc springs

The following dimension tables describe:


- > Standard materials (C75S and 51CrV4) Page 11-18
- > Corrosion-resistant materials (X10 CrNi 18-8) Page 18-21
- > Corrosion-resistant materials (X7 CrNiAl 17-7) Page 21

Further versions:

Furthermore, we also manufacture from special materials, such as:

- > Steel grades for higher temperatures (X22 CrMoV 12-1, X39 CrMo 17-1)
- > Copper alloys (CuSn 8, CuBe 2)
- > Nickel and cobalt alloys (Nimonic 90, Inconel X750, Inconel 718)
- > and other material grades

For this, please see our material grade overview table on pages 42 and 43

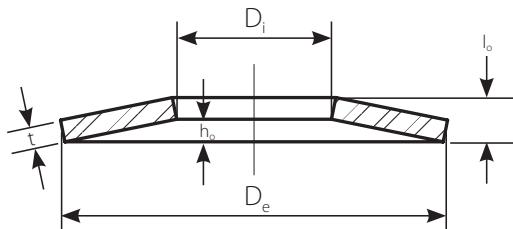

Reference for a disc spring

$D_e = 40 \text{ mm}$, $D_i = 20.4 \text{ mm}$, $t = 1.5 \text{ mm}$:
Disc spring $40 \times 20.4 \times 1.5$
according to DIN EN 16983
or Article no. 012 800

Original SCHNORR® disc spring standard material										$\varnothing 6 - 15 \text{ mm}$		
Article-number/ Order reference	Ordering dimensions						Gr. acc. to DIN EN 16983	per 1000 pieces [kg]	Spring travel s and force F			
	D_e [mm]	D_i [mm]	t [mm]	t' [mm]	l_o [mm]	h_o [mm]			s [mm]	F [N]	s [mm]	F [N]
000 100	6,00	3,20	0,30		0,45	0,15	1	0,044	0,038	45	0,075	84
000 200	8,00	3,20	0,20		0,40	0,20	1	0,064	0,050	12	0,100	21
000 300	8,00	3,20	0,30		0,55	0,25	1	0,093	0,063	46	0,125	79
000 400	8,00	3,20	0,40		0,60	0,20	1	0,126	0,050	69	0,100	130
000 550 C	8,00	4,20	0,20		0,45	0,25	1	0,055	0,063	21	0,125	33
000 600 B	8,00	4,20	0,30		0,55	0,25	1	0,080	0,063	52	0,125	89
000 700 A	8,00	4,20	0,40		0,60	0,20	1	0,107	0,050	78	0,100	147
000 800	10,00	3,20	0,30		0,65	0,35	1	0,157	0,088	51	0,175	82
000 900	10,00	3,20	0,40		0,70	0,30	1	0,211	0,075	75	0,150	133
001 000	10,00	3,20	0,50		0,75	0,25	1	0,266	0,063	104	0,125	196
001 100	10,00	4,20	0,40		0,70	0,30	1	0,193	0,075	79	0,150	140
001 200	10,00	4,20	0,50		0,75	0,25	1	0,243	0,063	110	0,125	206
001 300 C	10,00	5,20	0,25		0,55	0,30	1	0,109	0,075	31	0,150	48
001 400 B	10,00	5,20	0,40		0,70	0,30	1	0,170	0,075	88	0,150	155
001 500 A	10,00	5,20	0,50		0,75	0,25	1	0,214	0,063	122	0,125	228
001 600	12,00	4,20	0,40		0,80	0,40	1	0,297	0,100	85	0,200	141
001 700	12,00	4,20	0,50		0,85	0,35	1	0,374	0,088	116	0,175	208
001 800	12,00	4,20	0,60		1,00	0,40	1	0,450	0,100	224	0,200	405
001 900	12,00	5,20	0,50		0,90	0,40	1	0,345	0,100	151	0,200	263
002 000	12,00	5,20	0,60		0,95	0,35	1	0,415	0,088	196	0,175	361
002 100	12,00	6,20	0,50		0,85	0,35	1	0,310	0,088	134	0,175	239
002 200	12,00	6,20	0,60		0,95	0,35	1	0,373	0,088	214	0,175	394
002 300	12,50	5,20	0,50		0,85	0,35	1	0,382	0,088	111	0,175	200
002 050 C	12,50	6,20	0,35		0,80	0,45	1	0,251	0,113	84	0,225	130
002 500 B	12,50	6,20	0,50		0,85	0,35	1	0,346	0,088	120	0,175	215
002 700 A	12,50	6,20	0,70		1,00	0,30	1	0,488	0,075	240	0,150	457
002 750 C	14,00	7,20	0,35		0,80	0,45	1	0,308	0,113	68	0,225	106
002 800 B	14,00	7,20	0,50		0,90	0,40	1	0,425	0,100	120	0,200	210
002 900 A	14,00	7,20	0,80		1,10	0,30	1	0,676	0,075	284	0,150	547
003 000	15,00	5,20	0,40		0,95	0,55	1	0,468	0,138	101	0,275	154
003 100	15,00	5,20	0,50		1,00	0,50	1	0,588	0,125	133	0,250	221
003 200	15,00	5,20	0,60		1,05	0,45	1	0,708	0,113	171	0,225	302
003 300	15,00	5,20	0,70		1,10	0,40	1	0,828	0,100	214	0,200	395
003 500	15,00	6,20	0,50		1,00	0,50	1	0,553	0,125	138	0,250	230
003 600	15,00	6,20	0,60		1,05	0,45	1	0,665	0,113	178	0,225	314
003 700	15,00	6,20	0,70		1,10	0,40	1	0,778	0,100	222	0,200	411
003 800	15,00	8,20	0,70		1,10	0,40	1	0,654	0,100	256	0,200	474
003 900	15,00	8,20	0,80		1,20	0,40	1	0,740	0,100	367	0,200	689

Original SCHNORR® disc springs standard material										Ø 16 - 23 mm				
Article-number/ Order reference	Order reference						Weight per 1000 pieces	Spring travel s and force F						
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]	
004 100 C	16,00	8,20	0,40		0,90	0,50	1	0,444	0,125	84	0,250	131	0,375	154
004 300 B	16,00	8,20	0,60		1,05	0,45	1	0,672	0,113	172	0,225	304	0,338	410
004 400	16,00	8,20	0,70		1,15	0,45	1	0,786	0,113	254	0,225	461	0,338	637
004 500	16,00	8,20	0,80		1,20	0,40	1	0,888	0,100	308	0,200	579	0,300	825
004 600 A	16,00	8,20	0,90		1,25	0,35	1	1,002	0,088	363	0,175	697	0,263	1013
004 700	18,00	6,20	0,40		1,00	0,60	1	0,677	0,150	85	0,300	126	0,450	139
004 800	18,00	6,20	0,50		1,10	0,60	1	0,850	0,150	130	0,300	206	0,450	246
004 900	18,00	6,20	0,60		1,20	0,60	1	1,024	0,150	191	0,300	317	0,450	400
005 000	18,00	6,20	0,70		1,25	0,55	1	1,197	0,138	236	0,275	414	0,413	553
005 100	18,00	6,20	0,80		1,30	0,50	1	1,353	0,125	286	0,250	523	0,375	726
005 200	18,00	8,20	0,50		1,10	0,60	1	0,762	0,150	140	0,300	222	0,450	265
005 300	18,00	8,20	0,70		1,25	0,55	1	1,073	0,138	255	0,275	446	0,413	596
005 400	18,00	8,20	0,80		1,30	0,50	1	1,213	0,125	309	0,250	564	0,375	783
005 500	18,00	8,20	1,00		1,40	0,40	1	1,524	0,100	425	0,200	815	0,300	1181
005 550 C	18,00	9,20	0,45		1,05	0,60	1	0,651	0,150	121	0,300	186	0,450	214
005 600 B	18,00	9,20	0,70		1,20	0,50	1	0,999	0,125	233	0,250	417	0,375	566
005 700 A	18,00	9,20	1,00		1,40	0,40	1	1,418	0,100	451	0,200	865	0,300	1254
005 800	20,00	8,20	0,60		1,30	0,70	1	1,191	0,175	214	0,350	342	0,525	412
005 900	20,00	8,20	0,70		1,35	0,65	1	1,393	0,163	262	0,325	442	0,488	569
006 000	20,00	8,20	0,80		1,40	0,60	1	1,574	0,150	315	0,300	557	0,450	751
006 100	20,00	8,20	0,90		1,45	0,55	1	1,776	0,138	374	0,275	685	0,413	954
006 200	20,00	8,20	1,00		1,55	0,55	1	1,978	0,138	494	0,275	918	0,413	1295
006 300 C	20,00	10,20	0,50		1,15	0,65	1	0,876	0,163	141	0,325	219	0,488	254
006 400 B	20,00	10,20	0,80		1,35	0,55	1	1,394	0,138	304	0,275	547	0,413	748
006 500	20,00	10,20	0,90		1,45	0,55	1	1,573	0,138	412	0,275	754	0,413	1050
006 600	20,00	10,20	1,00		1,55	0,55	1	1,752	0,138	544	0,275	1010	0,413	1425
006 700 A	20,00	10,20	1,10		1,55	0,45	1	1,913	0,113	548	0,225	1050	0,338	1521
006 800	20,00	10,20	1,25		1,75	0,50	2 ^g	2,181	0,125	890	0,250	1708	0,375	2477
018 982	20,00	10,20	1,25		1,75	0,50	2 ^f	2,181	0,125	890	0,250	1708	0,375	2477
006 900	20,00	10,20	1,50		1,80	0,30	2 ^g	2,610	0,075	857	0,150	1695	0,225	2521
018 983	20,00	10,20	1,50		1,80	0,30	2 ^f	2,610	0,075	857	0,150	1695	0,225	2521
007 000 C	22,50	11,20	0,60		1,40	0,80	1	1,361	0,200	241	0,400	370	0,600	426
007 100 B	22,50	11,20	0,80		1,45	0,65	1	1,799	0,163	306	0,325	533	0,488	708
007 200 A	22,50	11,20	1,25		1,75	0,50	2 ^g	2,814	0,125	693	0,250	1330	0,375	1929
019 984 A	22,50	11,20	1,25		1,75	0,50	2 ^f	2,814	0,125	693	0,250	1330	0,375	1929
007 400	23,00	8,20	0,70		1,50	0,80	1	1,939	0,200	280	0,400	448	0,600	544
007 500	23,00	8,20	0,80		1,55	0,75	1	2,192	0,188	332	0,375	560	0,563	719
007 600	23,00	8,20	0,90		1,60	0,70	1	2,472	0,175	391	0,350	687	0,525	919
007 700	23,00	8,20	1,00		1,70	0,70	1	2,753	0,175	507	0,350	909	0,525	1240
007 800	23,00	10,20	0,90		1,65	0,75	1	2,270	0,188	463	0,375	802	0,563	1058
007 900	23,00	10,20	1,00		1,70	0,70	1	2,527	0,175	538	0,350	964	0,525	1315
008 000	23,00	10,20	1,25		1,90	0,65	2 ^g	3,172	0,163	870	0,325	1627	0,488	2310
019 985	23,00	10,20	1,25		1,90	0,65	2 ^f	3,172	0,163	870	0,325	1627	0,488	2310
008 100	23,00	12,20	1,00		1,60	0,60	1	2,255	0,150	475	0,300	872	0,450	1217
008 200	23,00	12,20	1,25		1,85	0,60	2 ^g	2,807	0,150	864	0,300	1630	0,450	2331
018 986	23,00	12,20	1,25		1,85	0,60	2 ^f	2,807	0,150	863	0,300	1630	0,450	2331
008 350	23,00	12,20	1,50		2,00	0,50	2 ^g	3,359	0,125	1159	0,250	2250	0,375	3297
013 433	23,00	12,20	1,50		2,00	0,50	2 ^f	3,359	0,125	1159	0,250	2250	0,375	3297

^{2^g} = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i) ^{2^f} = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material
Ø 25 - 34 mm

Article-number/ Order reference	Order reference						Weight per 1000 pieces	Spring travel s and force F				
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]		Gr. acc. to DIN EN 16983	s [mm]	F [N]	s [mm]	F [N]
008 600	25,00	10,20	1,00		1,75	0,75	1	3,105	0,188	492	0,375	870
008 700 C	25,00	12,20	0,70		1,60	0,90	1	1,994	0,225	331	0,450	515
008 800 B	25,00	12,20	0,90		1,60	0,70	1	2,543	0,175	367	0,350	644
008 900	25,00	12,20	1,00		1,80	0,80	1	2,832	0,200	585	0,400	1021
009 000	25,00	12,20	1,25		1,95	0,70	2 ^g	3,526	0,175	848	0,350	1573
018 987	25,00	12,20	1,25		1,95	0,70	2 ^f	3,526	0,175	848	0,350	1573
009 100 A	25,00	12,20	1,50		2,05	0,55	2 ^g	4,219	0,138	1040	0,275	2007
016 838 A	25,00	12,20	1,50		2,05	0,55	2 ^f	4,219	0,138	1040	0,275	2007
009 200	28,00	10,20	0,80		1,75	0,95	1	3,233	0,238	348	0,475	553
009 300	28,00	10,20	1,00		1,90	0,90	1	4,062	0,225	512	0,450	872
009 400	28,00	10,20	1,25		2,05	0,80	2 ^g	5,057	0,200	737	0,400	1339
018 988	28,00	10,20	1,25		2,05	0,80	2 ^f	5,057	0,200	737	0,400	1339
009 500	28,00	10,20	1,50		2,20	0,70	2 ^g	6,051	0,175	1003	0,350	1899
017 519	28,00	10,20	1,50		2,20	0,70	2 ^f	6,051	0,175	1003	0,350	1899
009 600	28,00	12,20	1,00		1,95	0,95	1	3,789	0,238	590	0,475	992
009 700	28,00	12,20	1,25		2,10	0,85	2 ^g	4,717	0,213	844	0,425	1519
014 236	28,00	12,20	1,25		2,10	0,85	2 ^f	4,717	0,213	844	0,425	1519
009 800	28,00	12,20	1,50		2,25	0,75	2 ^g	5,645	0,188	1149	0,375	2159
018 738	28,00	12,20	1,50		2,25	0,75	2 ^f	5,645	0,188	1149	0,375	2159
009 900 C	28,00	14,20	0,80		1,80	1,00	1	2,760	0,250	435	0,500	681
010 000 B	28,00	14,20	1,00		1,80	0,80	1	3,468	0,200	476	0,400	832
010 100	28,00	14,20	1,25		2,10	0,85	2 ^g	4,317	0,213	907	0,425	1634
014 426	28,00	14,20	1,25		2,10	0,85	2 ^f	4,317	0,213	907	0,425	1634
010 200 A	28,00	14,20	1,50		2,15	0,65	2 ^g	5,166	0,163	1033	0,325	1970
018 599 A	28,00	14,20	1,50		2,15	0,65	2 ^f	5,166	0,163	1033	0,325	1970
010 300	31,50	12,20	1,00		2,10	1,10	1	5,035	0,275	587	0,550	951
010 400	31,50	12,20	1,25		2,20	0,95	2 ^g	6,268	0,238	761	0,475	1343
018 989	31,50	12,20	1,25		2,20	0,95	2 ^f	6,268	0,238	761	0,475	1343
010 500	31,50	12,20	1,50		2,35	0,85	2 ^g	7,501	0,213	1033	0,425	1912
018 990	31,50	12,20	1,50		2,35	0,85	2 ^f	7,501	0,213	1033	0,425	1912
010 650 C	31,50	16,30	0,80		1,85	1,05	1	3,442	0,263	384	0,525	594
010 700 B	31,50	16,30	1,25		2,15	0,90	2 ^g	5,384	0,225	791	0,450	1409
018 734 B	31,50	16,30	1,25		2,15	0,90	2 ^f	5,384	0,225	791	0,450	1409
010 800	31,50	16,30	1,50		2,40	0,90	2 ^g	6,443	0,225	1260	0,450	2314
014 396	31,50	16,30	1,50		2,40	0,90	2 ^f	6,443	0,225	1260	0,450	2314
010 900 A	31,50	16,30	1,75		2,45	0,70	2 ^g	7,546	0,175	1391	0,350	2669
018 991 A	31,50	16,30	1,75		2,45	0,70	2 ^f	7,546	0,175	1391	0,350	2669
011 000	31,50	16,30	2,00		2,75	0,75	2 ^g	8,605	0,188	2199	0,375	4239
014 399	31,50	16,30	2,00		2,75	0,75	2 ^f	8,605	0,188	2199	0,375	4239
011 100	34,00	12,30	1,00		2,25	1,25	1	6,006	0,313	637	0,625	998
011 200	34,00	12,30	1,25		2,35	1,10	2 ^g	7,477	0,275	815	0,550	1395
014 099	34,00	12,30	1,25		2,35	1,10	2 ^f	7,477	0,275	814	0,550	1393
011 300	34,00	12,30	1,50		2,50	1,00	2 ^g	8,948	0,250	1097	0,500	1982
014 235	34,00	12,30	1,50		2,50	1,00	2 ^f	8,948	0,250	1095	0,500	1979
011 400	34,00	14,30	1,25		2,40	1,15	2 ^g	7,074	0,288	913	0,575	1546
018 992	34,00	14,20	1,25		2,40	1,15	2 ^f	7,074	0,287	911	0,575	1543
011 500	34,00	14,30	1,50		2,55	1,05	2 ^g	8,465	0,263	1224	0,525	2192
018 993	34,00	14,20	1,50		2,55	1,05	2 ^f	8,465	0,262	1221	0,525	2187
011 600	34,00	16,30	1,50		2,55	1,05	2 ^g	7,911	0,263	1291	0,525	2313
018 994	34,00	16,30	1,50		2,55	1,05	2 ^f	7,911	0,263	1291	0,525	2313
011 700	34,00	16,30	2,00		2,85	0,85	2 ^g	10,570	0,213	2097	0,425	4003
014 397	34,00	16,30	2,00		2,85	0,85	2 ^f	10,570	0,213	2097	0,425	4003

 2^g = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i)

 2^f = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material										Ø 35,5 - 50 mm		
Article-number/ Order reference	Order reference						Weight per 1000 pieces	Spring travel s and force F				
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]		Gr. acc. to DIN EN 16983	s [mm]	F [N]	s [mm]	F [N]
011 850 C	35,50	18,30	0,90		2,05	1,15	1	4,952	0,288	458	0,575	712
011 900 B	35,50	18,30	1,25		2,25	1,00	2 ^g	6,865	0,250	731	0,500	1277
014 405 B	35,50	18,30	1,25		2,25	1,00	2 ^f	6,865	0,250	731	0,500	1277
012 000 A	35,50	18,30	2,00		2,80	0,80	2 ^g	10,970	0,200	1864	0,400	3576
014 537 A	35,50	18,30	2,00		2,80	0,80	2 ^f	10,970	0,200	1864	0,400	3576
012 100	40,00	14,30	1,25		2,65	1,40	2 ^g	10,400	0,350	904	0,700	1459
018 995	40,00	14,30	1,25		2,65	1,40	2 ^f	10,400	0,350	904	0,700	1459
012 200	40,00	14,30	1,50		2,75	1,25	2 ^g	12,450	0,313	1114	0,625	1929
012 626	40,00	14,20	1,50		2,75	1,25	2 ^f	12,450	0,313	1113	0,625	1927
012 300	40,00	14,30	2,00		3,05	1,05	2 ^g	16,630	0,263	1800	0,525	3363
018 996	40,00	14,20	2,00		3,05	1,05	2 ^f	16,630	0,262	1797	0,525	3359
012 400	40,00	16,30	1,50		2,80	1,30	2 ^g	11,890	0,325	1224	0,650	2102
016 296	40,00	16,30	1,50		2,80	1,30	2 ^f	11,890	0,325	1224	0,650	2102
012 500	40,00	16,30	2,00		3,10	1,10	2 ^g	15,890	0,275	1972	0,550	3663
018 997	40,00	16,30	2,00		3,10	1,10	2 ^f	15,890	0,275	1972	0,550	3663
012 600	40,00	18,30	2,00		3,15	1,15	2 ^g	15,040	0,288	2182	0,575	4030
018 998	40,00	18,30	2,00		3,15	1,15	2 ^f	15,040	0,288	2182	0,575	4030
012 700 C	40,00	20,40	1,00		2,30	1,30	1	7,067	0,325	565	0,650	876
012 800 B	40,00	20,40	1,50		2,65	1,15	2 ^g	10,530	0,288	1109	0,575	1953
018 543 B	40,00	20,40	1,50		2,65	1,15	2 ^f	10,530	0,288	1109	0,575	1953
012 900	40,00	20,40	2,00		3,10	1,10	2 ^g	14,060	0,275	2175	0,550	4041
013 334	40,00	20,40	2,00		3,10	1,10	2 ^f	14,060	0,275	2175	0,550	4041
013 000 A	40,00	20,40	2,25		3,15	0,90	2 ^g	15,720	0,225	2336	0,450	4481
018 999 A	40,00	20,40	2,25		3,15	0,90	2 ^f	15,720	0,225	2336	0,450	4481
013 100	40,00	20,40	2,50		3,45	0,95	2 ^g	17,520	0,238	3351	0,475	6453
014 404	40,00	20,40	2,50		3,45	0,95	2 ^f	17,520	0,238	3351	0,475	6453
013 250 C	45,00	22,40	1,25		2,85	1,60	2 ^g	11,340	0,400	1041	0,800	1620
019 176 C	45,00	22,40	1,25		2,85	1,60	2 ^f	11,340	0,400	1041	0,800	1620
013 300 B	45,00	22,40	1,75		3,05	1,30	2 ^g	15,890	0,325	1524	0,650	2701
014 398 B	45,00	22,40	1,75		3,05	1,30	2 ^f	15,890	0,325	1524	0,650	2701
013 400 A	45,00	22,40	2,50		3,50	1,00	2 ^g	22,770	0,250	2773	0,500	5320
014 427 A	45,00	22,40	2,50		3,50	1,00	2 ^f	22,770	0,250	2773	0,500	5320
013 500	50,00	18,40	1,25		2,85	1,60	2 ^g	16,130	0,400	757	0,800	1178
019 177	50,00	18,40	1,25		2,85	1,60	2 ^f	16,130	0,400	757	0,800	1178
013 600	50,00	18,40	1,50		3,30	1,80	2 ^g	19,310	0,450	1379	0,900	2184
019 178	50,00	18,30	1,50		3,30	1,80	2 ^f	19,310	0,450	1378	0,900	2182
013 700	50,00	18,40	2,00		3,50	1,50	2 ^g	25,790	0,375	1918	0,750	3392
019 179	50,00	18,30	2,00		3,50	1,50	2 ^f	25,790	0,375	1916	0,750	3389
013 800	50,00	18,40	2,50		4,10	1,60	2 ^g	32,140	0,400	3703	0,800	6733
019 180	50,00	18,30	2,50		4,10	1,60	2 ^f	32,140	0,400	3699	0,800	6726
013 900	50,00	18,40	3,00		4,40	1,40	2 ^g	38,350	0,350	5043	0,700	9546
019 181	50,00	18,30	3,00		4,40	1,40	2 ^f	38,350	0,350	5038	0,700	9535
014 000	50,00	20,40	2,00		3,50	1,50	2 ^g	24,850	0,375	1966	0,750	3478
019 182	50,00	20,40	2,00		3,50	1,50	2 ^f	24,850	0,375	1966	0,750	3478
014 100	50,00	20,40	2,50		3,85	1,35	2 ^g	30,970	0,338	3008	0,675	5601
019 183	50,00	20,40	2,50		3,85	1,35	2 ^f	30,970	0,338	3008	0,675	5601
014 200	50,00	22,40	2,00		3,60	1,60	2 ^g	23,820	0,400	2247	0,800	3924
019 184	50,00	22,40	2,00		3,60	1,60	2 ^f	23,820	0,400	2247	0,800	3924
014 300	50,00	22,40	2,50		3,90	1,40	2 ^g	29,680	0,350	3261	0,700	6044
019 473	50,00	22,40	2,50		3,90	1,40	2 ^f	29,680	0,350	3261	0,700	6044
014 400 C	50,00	25,40	1,25		2,85	1,60	2 ^g	13,820	0,400	854	0,800	1328
019 185 C	50,00	25,40	1,25		2,85	1,60	2 ^f	13,820	0,400	854	0,800	1328
											1,200	1550

^{2^g} = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i)

^{2^f} = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material											Ø 50 - 70 mm	
Article-number/ Order reference	Order reference						Weight per 1000 pieces	Spring travel s and force F				
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]		Gr. acc. to DIN EN 16983	s [mm]	F [N]	s [mm]	F [N]
014 500	50,00	25,40	1,50		3,10	1,60	2 ^g	16,540	0,400	1242	0,800	2028
017 308	50,00	25,40	1,50		3,10	1,60	2 ^f	16,540	0,400	1242	0,800	2028
014 600 B	50,00	25,40	2,00		3,40	1,40	2 ^g	22,090	0,350	1949	0,700	3491
018 498 B	50,00	25,40	2,00		3,40	1,40	2 ^f	22,090	0,350	1949	0,700	3491
014 700	50,00	25,40	2,50		3,90	1,40	2 ^g	27,520	0,350	3473	0,700	6437
014 428	50,00	25,40	2,50		3,90	1,40	2 ^f	27,520	0,350	3473	0,700	6437
014 800 A	50,00	25,40	3,00		4,10	1,10	2 ^g	32,850	0,275	4255	0,550	8214
014 425 A	50,00	25,40	3,00		4,10	1,10	2 ^f	32,850	0,275	4255	0,550	8214
014 950 C	56,00	28,50	1,50		3,45	1,95	2 ^g	20,850	0,488	1458	0,975	2259
017 704 C	56,00	28,50	1,50		3,45	1,95	2 ^f	20,850	0,488	1458	0,975	2259
015 000 B	56,00	28,50	2,00		3,60	1,60	2 ^g	27,810	0,400	1910	0,800	3335
019 186 B	56,00	28,50	2,00		3,60	1,60	2 ^f	27,810	0,400	1910	0,800	3335
015 100 A	56,00	28,50	3,00		4,30	1,30	2 ^g	41,570	0,325	4142	0,650	7895
014 424 A	56,00	28,50	3,00		4,30	1,30	2 ^f	41,570	0,325	4142	0,650	7895
015 200	60,00	20,50	2,00		4,10	2,10	2 ^g	38,160	0,525	2318	1,050	3802
019 187	60,00	20,40	2,00		4,10	2,10	2 ^f	38,160	0,525	2316	1,050	3799
015 300	60,00	20,50	2,50		4,30	1,80	2 ^g	47,690	0,450	3018	0,900	5379
019 188	60,00	20,40	2,50		4,30	1,80	2 ^f	47,690	0,450	3016	0,900	5375
015 400	60,00	20,50	3,00		4,70	1,70	2 ^g	57,040	0,425	4449	0,850	8234
019 189	60,00	20,50	3,00		4,70	1,70	2 ^f	57,040	0,425	4449	0,850	8234
015 500	60,00	25,50	2,50		4,40	1,90	2 ^g	44,200	0,475	3447	0,950	6081
019 190	60,00	25,40	2,50		4,40	1,90	2 ^f	44,200	0,475	3442	0,950	6073
015 600	60,00	25,50	3,00		4,65	1,65	2 ^g	52,860	0,413	4495	0,825	8352
019 191	60,00	25,40	3,00		4,65	1,65	2 ^f	52,860	0,412	4489	0,825	8341
015 700	60,00	30,50	2,50		4,30	1,80	2 ^g	39,940	0,450	3447	0,900	6145
012 758	60,00	30,50	2,50		4,30	1,80	2 ^f	39,940	0,450	3447	0,900	6145
015 800	60,00	30,50	3,00		4,70	1,70	2 ^g	47,770	0,425	5083	0,850	9407
017 070	60,00	30,50	3,00		4,70	1,70	2 ^f	47,770	0,425	5083	0,850	9407
015 900	60,00	30,50	3,50		5,00	1,50	2 ^g	55,100	0,375	6591	0,750	12574
016 881	60,00	30,50	3,50		5,00	1,50	2 ^f	55,100	0,375	6591	0,750	12574
016 050 C	63,00	31,00	1,80		4,15	2,35	2 ^g	32,530	0,588	2364	1,175	3658
019 192 C	63,00	31,00	1,80		4,15	2,35	2 ^f	32,530	0,588	2364	1,175	3658
016 100 B	63,00	31,00	2,50		4,25	1,75	2 ^g	44,850	0,438	2942	0,875	5270
019 193 B	63,00	31,00	2,50		4,25	1,75	2 ^f	44,850	0,438	2942	0,875	5270
016 200	63,00	31,00	3,00		4,80	1,80	2 ^g	53,860	0,450	4891	0,900	8981
014 429	63,00	31,00	3,00		4,80	1,80	2 ^f	53,860	0,450	4891	0,900	8981
016 300 A	63,00	31,00	3,50		4,90	1,40	2 ^g	62,130	0,350	5399	0,700	10359
018 637 A	63,00	31,00	3,50		4,90	1,40	2 ^f	62,130	0,350	5399	0,700	10359
016 400	70,00	25,50	2,00		4,50	2,50	2 ^g	50,780	0,625	2408	1,250	3771
019 194	70,00	25,50	2,00		4,50	2,50	2 ^f	50,780	0,625	2408	1,250	3771
016 500	70,00	30,50	2,50		4,90	2,40	2 ^g	59,530	0,600	3755	1,200	6297
019 195	70,00	30,50	2,50		4,90	2,40	2 ^f	59,530	0,600	3755	1,200	6297
016 600	70,00	30,50	3,00		5,10	2,10	2 ^g	71,190	0,525	4676	1,050	8376
019 196	70,00	30,50	3,00		5,10	2,10	2 ^f	71,190	0,525	4676	1,050	8376
016 700	70,00	35,50	3,00		5,10	2,10	2 ^g	65,210	0,525	5028	1,050	9007
019 197	70,00	35,50	3,00		5,10	2,10	2 ^f	65,210	0,525	5028	1,050	9007
016 800	70,00	35,50	4,00		5,80	1,80	2 ^g	86,130	0,450	8757	0,900	16634
019 198	70,00	35,50	4,00		5,80	1,80	2 ^f	86,130	0,450	8757	0,900	16634
016 900	70,00	40,50	4,00		5,60	1,60	2 ^g	77,040	0,400	8391	0,800	16099
019 199	70,00	40,50	4,00		5,60	1,60	2 ^f	77,040	0,400	8391	0,800	16099
017 000	70,00	40,50	5,00		6,20	1,20	2 ^g	95,150	0,300	11544	0,600	22728
017 085	70,00	40,50	5,00		6,20	1,20	2 ^f	95,150	0,300	11544	0,600	22728

^{2^g} = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i) 2^f = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material											Ø 71 - 112 mm	
Article-number/ Order reference	Order reference						Gr. acc. to DIN EN 16983	per 1000 pieces	Spring travel s and force F			
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]			s [mm]	F [N]	s [mm]	F [N]
017 100 C	71,00	36,00	2,00		4,60	2,60	2 ^g	44,660	0,650	2861	1,300	4432
019 200 C	71,00	36,00	2,00		4,60	2,60	2 ^f	44,660	0,650	2861	1,300	4432
017 200 B	71,00	36,00	2,50		4,50	2,00	2 ^g	56,110	0,500	2894	1,000	5054
019 201 B	71,00	36,00	2,50		4,50	2,00	2 ^f	56,110	0,500	2894	1,000	5054
017 300 A	71,00	36,00	4,00		5,60	1,60	2 ^g	88,630	0,400	7379	0,800	14157
017 196 A	71,00	36,00	4,00		5,60	1,60	2 ^f	88,630	0,400	7379	0,800	14157
017 400	80,00	31,00	2,50		5,30	2,80	2 ^g	82,010	0,700	3678	1,400	5933
019 202	80,00	31,00	2,50		5,30	2,80	2 ^f	82,010	0,700	3678	1,400	5933
017 500	80,00	31,00	3,00		5,50	2,50	2 ^g	98,010	0,625	4531	1,250	7847
019 203	80,00	31,00	3,00		5,50	2,50	2 ^f	98,010	0,625	4531	1,250	7847
017 600	80,00	31,00	4,00		6,10	2,10	2 ^g	130,000	0,525	7319	1,050	13677
014 522	80,00	31,00	4,00		6,10	2,10	2 ^f	130,000	0,525	7319	1,050	13677
017 700	80,00	36,00	3,00		5,70	2,70	2 ^g	91,920	0,675	5401	1,350	9196
019 204	80,00	36,00	3,00		5,70	2,70	2 ^f	91,920	0,675	5401	1,350	9196
017 800	80,00	36,00	4,00		6,20	2,20	2 ^g	121,900	0,550	8163	1,100	15168
018 573	80,00	36,00	4,00		6,20	2,20	2 ^f	121,900	0,550	8163	1,100	15168
017 850 C	80,00	41,00	2,25		5,20	2,95	2 ^g	63,540	0,738	3698	1,475	5715
018 739 C	80,00	41,00	2,25		5,20	2,95	2 ^f	63,540	0,738	3698	1,475	5715
017 900 B	80,00	41,00	3,00		5,30	2,30	2 ^g	84,920	0,575	4450	1,150	7838
016 935 B	80,00	41,00	3,00		5,30	2,30	2 ^f	84,920	0,575	4450	1,150	7838
018 000	80,00	41,00	4,00		6,20	2,20	2 ^g	112,600	0,550	8726	1,100	16213
018 674	80,00	41,00	4,00		6,20	2,20	2 ^f	112,600	0,550	8726	1,100	16213
018 100 A	80,00	41,00	5,00		6,70	1,70	2 ^g	139,500	0,425	11821	0,850	22928
018 934 A	80,00	41,00	5,00		6,70	1,70	2 ^f	139,500	0,425	11821	0,850	22928
018 200 C	90,00	46,00	2,50		5,70	3,20	2 ^g	89,740	0,800	4232	1,600	6585
018 935 C	90,00	46,00	2,50		5,70	3,20	2 ^f	89,740	0,800	4232	1,600	6585
018 300 B	90,00	46,00	3,50		6,00	2,50	2 ^g	125,300	0,625	5836	1,250	10416
017 122 B	90,00	46,00	3,50		6,00	2,50	2 ^f	125,300	0,625	5836	1,250	10416
018 400 A	90,00	46,00	5,00		7,00	2,00	2 ^g	177,600	0,500	11267	1,000	21617
018 936 A	90,00	46,00	5,00		7,00	2,00	2 ^f	177,600	0,500	11267	1,000	21617
018 500	100,00	41,00	4,00		7,20	3,20	2 ^g	200,000	0,800	8714	1,600	15219
018 484	100,00	41,00	4,00		7,20	3,20	2 ^f	200,000	0,800	8714	1,600	15219
018 600	100,00	41,00	5,00		7,75	2,75	2 ^g	248,900	0,688	12345	1,375	22937
018 937	100,00	41,00	5,00		7,75	2,75	2 ^f	248,900	0,688	12345	1,375	22937
018 750 C	100,00	51,00	2,70		6,20	3,50	2 ^g	120,100	0,875	4779	1,750	7410
018 938 C	100,00	51,00	2,70		6,20	3,50	2 ^f	120,100	0,875	4779	1,750	7410
018 800 B	100,00	51,00	3,50		6,30	2,80	2 ^g	155,400	0,700	5624	1,400	9823
018 939 B	100,00	51,00	3,50		6,30	2,80	2 ^f	155,400	0,700	5624	1,400	9823
018 900	100,00	51,00	4,00		7,00	3,00	2 ^g	177,600	0,750	8673	1,500	15341
018 940	100,00	51,00	4,00		7,00	3,00	2 ^f	177,600	0,750	8673	1,500	15341
019 000	100,00	51,00	5,00		7,80	2,80	2 ^g	221,100	0,700	13924	1,400	25810
017 123	100,00	51,00	5,00		7,80	2,80	2 ^f	221,100	0,700	13924	1,400	25810
019 150 A	100,00	51,00	6,00		8,20	2,20	2 ^g	262,800	0,550	17061	1,100	32937
016 832 A	100,00	51,00	6,00		8,20	2,20	2 ^f	262,800	0,550	17061	1,100	32937
019 250 C	112,00	57,00	3,00		6,90	3,90	2 ^g	168,000	0,975	5834	1,950	9038
018 941 C	112,00	57,00	3,00		6,90	3,90	2 ^f	168,000	0,975	5834	1,950	9038
019 300 B	112,00	57,00	4,00		7,20	3,20	2 ^g	222,700	0,800	7639	1,600	13341
018 942 B	112,00	57,00	4,00		7,20	3,20	2 ^f	222,700	0,800	7639	1,600	13341
019 450 A	112,00	57,00	6,00		8,50	2,50	2 ^g	332,100	0,625	15800	1,250	30215
018 943 A	112,00	57,00	6,00		8,50	2,50	2 ^f	332,100	0,625	15800	1,250	30215

^{2^g} = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i) ^{2^f} = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material
Ø 125 - 180 mm

Article-number/ Order reference	Order reference						Gr. acc. to DIN EN 16983	per 1000 pieces	Spring travel s and force F			
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]			s [mm]	F [N]	s [mm]	F [N]
019 500	125,00	41,00	4,00		8,20	4,20	2 ^g	338,100	1,050	8501	2,100	13943
018 944	125,00	41,00	4,00		8,20	4,20	2 ^f	338,100	1,050	8501	2,100	13943
019 600	125,00	51,00	4,00		8,50	4,50	2 ^g	315,600	1,125	10096	2,250	16265
018 945	125,00	51,00	4,00		8,50	4,50	2 ^f	315,600	1,125	10096	2,250	16265
019 700	125,00	51,00	5,00		8,90	3,90	2 ^g	391,500	0,975	13063	1,950	22931
018 542	125,00	51,00	5,00		8,90	3,90	2 ^f	391,500	0,975	13063	1,950	22931
019 850	125,00	51,00	6,00		9,40	3,40	2 ^g	465,800	0,850	17027	1,700	31514
018 946	125,00	51,00	6,00		9,40	3,40	2 ^f	465,800	0,850	17027	1,700	31514
019 900	125,00	61,00	5,00		9,00	4,00	2 ^g	357,600	1,000	14615	2,000	25526
018 947	125,00	61,00	5,00		9,00	4,00	2 ^f	357,600	1,000	14615	2,000	25526
020 050	125,00	61,00	6,00		9,60	3,60	2 ^g	425,400	0,900	19789	1,800	36336
018 948	125,00	61,00	6,00		9,60	3,60	2 ^f	425,400	0,900	19789	1,800	36336
020 200 C	125,00	64,00	3,50		8,00	4,50	2 ^g	242,300	1,125	8514	2,250	13231
000 465 C	125,00	64,00	3,50		8,00	4,50	2 ^f	242,300	1,125	8514	2,250	13231
020 300 B	125,00	64,00	5,00		8,50	3,50	2 ^g	346,200	0,875	12238	1,750	21924
018 949 B	125,00	64,00	5,00		8,50	3,50	2 ^f	346,200	0,875	12238	1,750	21924
020 550	125,00	71,00	6,00		9,30	3,30	2 ^g	377,900	0,825	19538	1,650	36302
018 950	125,00	71,00	6,00		9,30	3,30	2 ^f	377,900	0,825	19538	1,650	36302
020 100	125,00	61,00	8,00	7,50	10,90	2,90	3	547,300	0,725	34434	1,450	65305
020 400 A	125,00	64,00	8,00	7,50	10,60	2,60	3	529,900	0,650	31118	1,300	59520
020 600	125,00	71,00	8,00	7,40	10,40	2,40	3	479,600	0,600	30867	1,200	59149
020 700	125,00	71,00	10,00	9,20	11,80	1,80	3	596,300	0,450	42963	0,900	84219
020 850 C	140,00	72,00	3,80		8,70	4,90	2 ^g	329,700	1,225	9514	2,450	14773
018 951 C	140,00	72,00	3,80		8,70	4,90	2 ^f	329,700	1,225	9514	2,450	14773
020 900 B	140,00	72,00	5,00		9,00	4,00	2 ^g	433,200	1,000	12014	2,000	20982
017 168 B	140,00	72,00	5,00		9,00	4,00	2 ^f	433,200	1,000	12014	2,000	20982
021 000 A	140,00	72,00	8,00	7,50	11,20	3,20	3	663,000	0,800	31903	1,600	59967
021 100	150,00	61,00	5,00		10,30	5,30	2 ^g	565,000	1,325	15292	2,650	25021
018 952	150,00	61,00	5,00		10,30	5,30	2 ^f	565,000	1,325	15292	2,650	25021
021 250	150,00	61,00	6,00		10,80	4,80	2 ^g	676,800	1,200	19560	2,400	34161
018 953	150,00	61,00	6,00		10,80	4,80	2 ^f	676,800	1,200	19560	2,400	34161
021 350	150,00	71,00	6,00		10,80	4,80	2 ^g	628,900	1,200	20721	2,400	36189
018 954	150,00	71,00	6,00		10,80	4,80	2 ^f	628,900	1,200	20721	2,400	36189
021 400	150,00	71,00	8,00	7,50	12,00	4,00	3	803,600	1,000	35296	2,000	64684
021 500	150,00	81,00	8,00	7,50	11,70	3,70	3	732,900	0,925	34518	1,850	63876
021 600	150,00	81,00	10,00	9,30	13,00	3,00	3	908,800	0,750	50088	1,500	96120
021 650 C	160,00	82,00	4,30		9,90	5,60	2 ^g	492,200	1,400	12162	2,800	18832
017 130 C	160,00	82,00	4,30		9,90	5,60	2 ^f	492,200	1,400	12162	2,800	18832
021 750 B	160,00	82,00	6,00		10,50	4,50	2 ^g	679,800	1,125	17203	2,250	30431
018 955 B	160,00	82,00	6,00		10,50	4,50	2 ^f	679,800	1,125	17203	2,250	30431
021 800 A	160,00	82,00	10,00	9,40	13,50	3,50	3	1089,000	0,875	50547	1,750	96216
021 850 C	180,00	92,00	4,80		11,00	6,20	2 ^g	705,300	1,550	14646	3,100	22731
018 956 C	180,00	92,00	4,80		11,00	6,20	2 ^f	705,300	1,550	14646	3,100	22731
021 950 B	180,00	92,00	6,00		11,10	5,10	2 ^g	862,500	1,275	16558	2,550	28552
018 957 B	180,00	92,00	6,00		11,10	5,10	2 ^f	862,500	1,275	16558	2,550	28552
022 000 A	180,00	92,00	10,00	9,40	14,00	4,00	3	1381,000	1,000	46850	2,000	88141

 2^g = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i)

 2^f = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Original SCHNORR® disc springs standard material										Ø 200 - 250 mm				
Article-number/ Order reference	Order reference						Weight per 1000 pieces	Spring travel s and force F						
	D _e [mm]	D _i [mm]	t [mm]	t' [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]	
022 100	200,00	82,00	8,00	7,60	14,20	6,20	3	1554,000	1,550	35029	3,100	60013	4,650	78034
022 200	200,00	82,00	10,00	9,60	15,50	5,50	3	1962,000	1,375	51105	2,750	93357	4,125	129445
022 300	200,00	82,00	12,00	11,50	16,60	4,60	3	2351,000	1,150	66924	2,300	127191	3,450	182737
022 400	200,00	92,00	10,00	9,50	15,60	5,60	3	1840,000	1,400	55136	2,800	100014	4,200	137688
022 500	200,00	92,00	12,00	11,40	16,80	4,80	3	2208,000	1,200	73913	2,400	139548	3,600	199269
022 600	200,00	92,00	14,00	13,10	18,10	4,10	3	2537,000	1,025	95633	2,050	184092	3,075	267227
022 650 C	200,00	102,00	5,50		12,50	7,00	2 ^g	999,300	1,750	19817	3,500	30882	5,250	36111
018 958 C	200,00	102,00	5,50		12,50	7,00	2 ^f	999,300	1,750	19817	3,500	30882	5,250	36111
022 700 B	200,00	102,00	8,00	7,50	13,60	5,60	3	1363,000	1,400	33367	2,800	57955	4,200	76378
022 800	200,00	102,00	10,00	9,40	15,60	5,60	3	1708,000	1,400	58757	2,800	106099	4,200	145357
022 900 A	200,00	102,00	12,00	11,25	16,20	4,20	3	2044,000	1,050	66983	2,100	127401	3,150	183020
023 000	200,00	102,00	14,00	13,10	18,20	4,20	3	2380,000	1,050	103781	2,100	199476	3,150	289181
023 100	200,00	112,00	12,00	11,10	16,20	4,20	3	1870,000	1,050	72257	2,100	136873	3,150	195830
023 200	200,00	112,00	14,00	12,90	17,50	3,50	3	2173,000	0,875	91033	1,750	176156	2,625	256758
023 300	200,00	112,00	16,00	14,80	18,80	2,80	3	2493,000	0,700	105268	1,400	206697	2,100	305100
023 350 C	225,00	112,00	6,50	6,20	13,60	7,10	3	1450,000	1,775	23582	3,550	37417	5,325	44580
023 400 B	225,00	112,00	8,00	7,50	14,50	6,50	3	1754,000	1,625	32870	3,250	55412	4,875	70749
023 500 A	225,00	112,00	12,00	11,25	17,00	5,00	3	2631,000	1,250	64497	2,500	120738	3,750	171016
023 600	250,00	102,00	10,00	9,60	18,00	8,00	3	3075,000	2,000	56867	4,000	97282	6,000	126387
023 700	250,00	102,00	12,00	11,50	19,00	7,00	3	3683,000	1,750	73563	3,500	133130	5,250	182962
023 750 C	250,00	127,00	7,00	6,70	14,80	7,80	3	1909,000	1,950	26895	3,900	42527	5,850	50466
023 800 B	250,00	127,00	10,00	9,40	17,00	7,00	3	2678,000	1,750	51871	3,500	90206	5,250	119053
023 900	250,00	127,00	12,00	11,25	19,30	7,30	3	3205,000	1,825	87633	3,650	156021	5,475	210806
024 000 A	250,00	127,00	14,00	13,10	19,60	5,60	3	3732,000	1,400	93239	2,800	175145	4,200	248828
024 100	250,00	127,00	16,00	15,00	21,80	5,80	3	4273,000	1,450	140941	2,900	267295	4,350	383017

^{2^g} = according to group 2 (DIN EN 16983) - manufacturing process turned (D_e/D_i) ^{2^f} = according to group 2 (DIN EN 16983) - manufacturing process fine blanked

Corrosion-resistant SCHNORR® disc springs, material 1.4310 (X10 CrNi 18-8)										Ø 6 - 12 mm			
Article Number/ Order reference	Ordering dimensions					Weight per 1000 pieces	Spring travel s and force F						
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]	
024650	6,00	3,20	0,30	0,45	0,15	0,047	0,038	41	0,075	77	0,113	110	
025250	8,00	3,20	0,20	0,40	0,20	0,066	0,050	11	0,100	19	0,150	24	
025400	8,00	3,20	0,30	0,55	0,25	0,098	0,063	42	0,125	73	0,188	96	
025700	8,00	3,20	0,40	0,55	0,15	0,131	0,038	45	0,075	87	0,113	126	
026300	8,00	3,20	0,50	0,70	0,20	0,166	0,050	118	0,100	227	0,150	330	
026700	8,00	4,20	0,20	0,45	0,25	0,057	0,063	20	0,125	31	0,188	36	
027100	8,00	4,20	0,30	0,50	0,20	0,085	0,050	34	0,100	61	0,150	84	
027400	8,00	4,20	0,40	0,60	0,20	0,113	0,050	72	0,100	136	0,150	193	
028910	10,00	3,20	0,30	0,65	0,35	0,165	0,088	47	0,175	75	0,263	91	
029101	10,00	3,20	0,40	0,70	0,30	0,220	0,075	69	0,150	123	0,225	165	
029301	10,00	3,20	0,50	0,70	0,20	0,274	0,050	73	0,100	140	0,150	203	
029602	10,00	4,20	0,40	0,70	0,30	0,202	0,075	73	0,150	129	0,225	174	
029701	10,00	4,20	0,50	0,70	0,20	0,252	0,050	77	0,100	148	0,150	214	
030290	10,00	5,20	0,25	0,55	0,30	0,112	0,075	28	0,150	44	0,225	53	
030800	10,00	5,20	0,40	0,65	0,25	0,179	0,063	62	0,125	113	0,188	157	
031000	10,00	5,20	0,50	0,70	0,20	0,223	0,050	85	0,100	163	0,150	237	
032040	12,00	4,20	0,40	0,80	0,40	0,309	0,100	79	0,200	130	0,300	165	
032500	12,00	4,20	0,50	0,80	0,30	0,386	0,075	86	0,150	158	0,225	220	

Corrosion-resistant SCHNORR® disc springs, material 1.4310 (X10 CrNi 18-8)											Ø 12 - 20 mm	
Article Number/ Order reference	Ordering dimensions					Weight per 1000 pieces [kg]	Spring travel s and force F					
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]
032704	12,00	4,20	0,60	0,85	0,25	0,463	0,063	111	0,125	213	0,188	308
033400	12,00	5,20	0,50	0,80	0,30	0,357	0,075	91	0,150	166	0,225	232
033500	12,00	5,20	0,60	0,85	0,25	0,429	0,063	118	0,125	225	0,188	325
034200	12,00	6,20	0,50	0,85	0,35	0,323	0,088	123	0,175	221	0,263	301
034550	12,00	6,20	0,60	0,85	0,25	0,387	0,063	128	0,125	245	0,188	355
035040	12,50	5,20	0,50	0,85	0,35	0,395	0,088	103	0,175	184	0,263	251
035103	12,50	6,20	0,35	0,80	0,45	0,253	0,113	77	0,225	120	0,338	140
035400	12,50	6,20	0,50	0,85	0,35	0,361	0,088	111	0,175	198	0,263	271
035601	12,50	6,20	0,70	0,95	0,25	0,504	0,063	178	0,125	344	0,188	503
038353	14,00	7,20	0,35	0,80	0,45	0,310	0,113	63	0,225	98	0,338	114
038600	14,00	7,20	0,50	0,90	0,40	0,442	0,100	111	0,200	194	0,300	258
039040	14,00	7,20	0,80	1,05	0,25	0,706	0,063	213	0,125	414	0,188	608
039500	15,00	5,20	0,40	0,95	0,55	0,486	0,138	93	0,275	142	0,413	162
039800	15,00	5,20	0,50	1,00	0,50	0,607	0,125	123	0,250	203	0,375	257
039971	15,00	5,20	0,60	1,05	0,45	0,728	0,113	158	0,225	279	0,338	376
040130	15,00	5,20	0,70	1,10	0,40	0,849	0,100	197	0,200	365	0,300	512
040950	15,00	6,20	0,50	1,00	0,50	0,572	0,125	127	0,250	212	0,375	267
041301	15,00	6,20	0,60	1,00	0,40	0,687	0,100	137	0,200	248	0,300	341
041700	15,00	6,20	0,70	1,05	0,35	0,801	0,088	172	0,175	323	0,263	461
042400	15,00	8,20	0,70	1,00	0,30	0,677	0,075	164	0,150	312	0,225	451
042601	15,00	8,20	0,80	1,10	0,30	0,773	0,075	238	0,150	459	0,225	668
043750	16,00	8,20	0,40	0,90	0,50	0,464	0,125	77	0,250	121	0,375	142
044000	16,00	8,20	0,60	1,05	0,45	0,695	0,113	159	0,225	281	0,338	378
044101	16,00	8,20	0,70	1,05	0,35	0,811	0,088	167	0,175	313	0,263	446
044201	16,00	8,20	0,80	1,10	0,30	0,926	0,075	200	0,150	386	0,225	561
044400	16,00	8,20	0,90	1,20	0,30	1,042	0,075	280	0,150	543	0,225	796
045800	18,00	6,20	0,40	1,00	0,60	0,702	0,150	78	0,300	116	0,450	128
046003	18,00	6,20	0,50	1,10	0,60	0,878	0,150	120	0,300	190	0,450	226
046252	18,00	6,20	0,60	1,20	0,60	1,053	0,150	176	0,300	293	0,450	369
046400	18,00	6,20	0,70	1,25	0,55	1,228	0,138	218	0,275	382	0,413	510
046505	18,00	6,20	0,80	1,30	0,50	1,403	0,125	264	0,250	482	0,375	669
046924	18,00	8,20	0,50	1,10	0,60	0,789	0,150	129	0,300	205	0,450	244
047070	18,00	8,20	0,70	1,20	0,50	1,104	0,125	203	0,250	362	0,375	492
047300	18,00	8,20	0,80	1,25	0,45	1,262	0,113	246	0,225	457	0,338	643
047691	18,00	8,20	1,00	1,35	0,35	1,576	0,088	335	0,175	649	0,263	948
047910	18,00	9,20	0,45	1,05	0,60	0,662	0,150	111	0,300	171	0,450	197
048050	18,00	9,20	0,70	1,20	0,50	1,029	0,125	215	0,250	384	0,375	522
048098	18,00	9,20	1,00	1,35	0,35	1,469	0,088	356	0,175	689	0,263	1006
048051	20,00	8,20	0,50	1,15	0,65	1,029	0,163	118	0,325	183	0,488	213
051100	20,00	8,20	0,60	1,30	0,70	1,226	0,175	198	0,350	316	0,525	380
052270	20,00	8,20	0,70	1,35	0,65	1,430	0,163	241	0,325	408	0,488	524
051450	20,00	8,20	0,80	1,40	0,60	1,634	0,150	291	0,300	514	0,450	693
051701	20,00	8,20	0,90	1,45	0,55	1,838	0,138	345	0,275	632	0,413	880
051761	20,00	8,20	1,00	1,45	0,45	2,042	0,113	352	0,225	669	0,338	962
052803	20,00	10,20	0,50	1,15	0,65	0,910	0,163	130	0,325	202	0,488	234
052804	20,00	10,20	0,60	1,20	0,60	1,098	0,150	163	0,300	271	0,450	342
053500	20,00	10,20	0,80	1,35	0,55	1,454	0,138	281	0,275	504	0,413	690
053701	20,00	10,20	0,90	1,40	0,50	1,635	0,125	333	0,250	619	0,375	872
053901	20,00	10,20	1,00	1,40	0,40	1,817	0,100	336	0,200	645	0,300	936
054380	20,00	10,20	1,10	1,50	0,40	1,998	0,100	440	0,200	850	0,300	1240
055280	20,00	10,20	1,25	1,55	0,30	2,269	0,075	463	0,150	911	0,225	1349
055650	20,00	10,20	1,50	1,75	0,25	2,721	0,063	654	0,125	1297	0,188	1934

Corrosion-resistant SCHNORR® disc springs, material 1.4310 (X10 CrNi 18-8)										Ø 22,5 - 45 mm		
Article Number/ Order reference	Ordering dimensions					Weight per 1000 pieces [kg]	Spring travel s and force F					
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]
057710	22,50	11,20	0,60	1,40	0,80	1,406	0,200	222	0,400	341	0,600	392
057903	22,50	11,20	0,80	1,45	0,65	1,873	0,163	283	0,325	492	0,488	653
058050	22,50	11,20	1,25	1,65	0,40	2,924	0,100	494	0,200	961	0,300	1411
058950	23,00	8,20	0,70	1,50	0,80	1,987	0,200	258	0,400	414	0,600	501
059210	23,00	8,20	0,80	1,55	0,75	2,271	0,188	306	0,375	517	0,563	663
059400	23,00	8,20	0,90	1,60	0,70	2,554	0,175	361	0,350	633	0,525	848
059504	23,00	8,20	1,00	1,60	0,60	2,838	0,150	375	0,300	689	0,450	962
060460	23,00	10,20	0,90	1,55	0,65	2,352	0,163	341	0,325	608	0,488	825
060600	23,00	10,20	1,00	1,60	0,60	2,613	0,150	398	0,300	731	0,450	1020
060901	23,00	10,20	1,25	1,70	0,45	3,264	0,113	512	0,225	989	0,338	1444
001922	23,00	12,20	1,00	1,60	0,60	2,337	0,150	438	0,300	804	0,450	1122
061600	23,00	12,20	1,25	1,65	0,40	2,919	0,100	492	0,200	958	0,300	1406
061951	23,00	12,20	1,50	1,85	0,35	3,501	0,088	722	0,175	1423	0,263	2110
063872	25,00	10,20	1,00	1,70	0,70	3,205	0,175	408	0,350	732	0,525	998
064400	25,00	12,20	0,70	1,60	0,90	2,052	0,225	305	0,450	475	0,675	553
064900	25,00	12,20	0,90	1,60	0,70	2,637	0,175	338	0,350	594	0,525	795
065104	25,00	12,20	1,00	1,65	0,65	2,929	0,163	394	0,325	715	0,488	987
065129	25,00	12,20	1,25	1,75	0,50	3,660	0,125	512	0,250	983	0,375	1425
065400	25,00	12,20	1,50	1,95	0,45	4,389	0,113	763	0,225	1490	0,338	2193
071600	28,00	10,20	0,80	1,75	0,95	3,351	0,238	321	0,475	510	0,713	610
071752	28,00	10,20	1,00	1,90	0,90	4,188	0,225	472	0,450	804	0,675	1042
007791	28,00	10,20	1,25	1,95	0,70	5,047	0,175	565	0,350	1047	0,525	1474
072105	28,00	10,20	1,50	2,10	0,60	6,277	0,150	767	0,300	1471	0,450	2134
072750	28,00	12,20	1,00	1,95	0,95	3,911	0,238	544	0,475	915	0,713	1170
072860	28,00	12,20	1,25	1,95	0,70	4,887	0,175	593	0,350	1099	0,525	1548
073300	28,00	12,20	1,50	2,05	0,55	5,862	0,138	727	0,275	1403	0,413	2045
075260	28,00	14,20	0,80	1,80	1,00	2,870	0,250	401	0,500	628	0,750	739
075700	28,00	14,20	1,00	1,80	0,80	3,586	0,200	439	0,400	767	0,600	1021
075925	28,00	14,20	1,25	1,90	0,65	4,480	0,163	578	0,325	1082	0,488	1535
076160	28,00	14,20	1,50	2,05	0,55	5,373	0,138	781	0,275	1508	0,413	2199
082253	31,50	12,20	1,00	2,10	1,10	5,191	0,275	541	0,550	877	0,825	1076
081505	31,50	12,20	1,25	2,15	0,90	6,486	0,225	646	0,450	1152	0,675	1564
082303	31,50	12,20	1,50	2,25	0,75	7,781	0,188	808	0,375	1519	0,563	2164
082801	31,50	16,30	0,80	1,85	1,05	3,577	0,263	354	0,525	548	0,788	634
004842	31,50	16,30	1,25	2,00	0,75	5,374	0,188	560	0,375	1029	0,563	1437
083800	31,50	16,30	1,50	2,15	0,65	6,698	0,163	763	0,325	1454	0,488	2097
084493	31,50	16,30	1,75	2,30	0,55	7,811	0,138	971	0,275	1892	0,413	2779
084800	31,50	16,30	2,00	2,50	0,50	8,923	0,125	1289	0,250	2534	0,375	3750
087900	34,00	12,30	1,00	2,25	1,25	6,187	0,313	588	0,625	920	0,938	1083
088046	34,00	12,30	1,25	2,35	1,10	7,732	0,275	752	0,550	1287	0,825	1677
088300	34,00	12,30	1,50	2,40	0,90	9,275	0,225	872	0,450	1600	0,675	2234
089321	34,00	14,30	1,25	2,30	1,05	7,321	0,263	723	0,525	1250	0,788	1646
089400	34,00	14,30	1,50	2,35	0,85	8,783	0,213	837	0,425	1549	0,638	2178
090500	34,00	16,30	1,50	2,30	0,80	8,216	0,200	815	0,400	1519	0,600	2151
091100	34,00	16,30	2,00	2,60	0,60	10,946	0,150	1293	0,300	2523	0,450	3713
004543	35,50	18,30	0,90	2,05	1,15	5,132	0,288	422	0,575	657	0,863	767
004616	35,50	18,30	1,25	2,25	1,00	6,852	0,250	674	0,500	1177	0,750	1567
093683	35,50	18,30	2,00	2,65	0,65	11,385	0,163	1352	0,325	2628	0,488	3855
099423	40,00	14,30	1,25	2,65	1,40	10,752	0,350	834	0,700	1346	1,050	1642
099461	40,00	14,30	1,50	2,75	1,25	12,899	0,313	1028	0,625	1779	0,938	2348
099833	40,00	14,30	2,00	2,90	0,90	17,189	0,225	1365	0,450	2592	0,675	3729
100503	40,00	16,30	1,50	2,70	1,20	12,332	0,300	992	0,600	1732	0,900	2304
100801	40,00	16,30	2,00	2,90	0,90	16,433	0,225	1406	0,450	2671	0,675	3842
101755	40,00	18,30	2,00	2,85	0,85	15,584	0,213	1367	0,425	2610	0,638	3770
102531	40,00	20,40	1,00	2,30	1,30	7,300	0,325	521	0,650	808	0,975	938
103000	40,00	20,40	1,50	2,60	1,10	10,942	0,275	955	0,550	1697	0,825	2296
103500	40,00	20,40	2,00	2,80	0,80	14,580	0,200	1345	0,400	2580	0,600	3743
103953	40,00	20,40	2,25	2,95	0,70	16,397	0,175	1613	0,350	3143	0,525	4618
104465	40,00	20,40	2,50	3,15	0,65	18,212	0,163	2017	0,325	3961	0,488	5856
004443	45,00	22,40	1,25	2,90	1,65	11,690	0,413	1023	0,825	1578	1,238	1822
110501	45,00	22,40	1,75	2,95	1,20	16,434	0,300	1247	0,600	2241	0,900	3068
110901	45,00	22,40	2,50	3,35	0,85	23,457	0,213	2116	0,425	4105	0,638	6008

Corrosion-resistant SCHNORR® disc springs, material 1.4310 (X10 CrNi 18-8)
Ø 50 - 90 mm

Article Number/ Order reference	Ordering dimensions					Weight per 1000 pieces [kg]	Spring travel s and force F					
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]
115970	50,00	18,40	1,25	2,85	1,60	16,679	0,400	698	0,800	1086	1,200	1268
116300	50,00	18,40	1,50	3,30	1,80	20,011	0,450	1272	0,900	2015	1,350	2404
116653	50,00	18,40	2,00	3,45	1,45	26,669	0,363	1680	0,725	2990	1,088	4054
116901	50,00	18,40	2,50	3,65	1,15	33,323	0,288	2203	0,575	4176	0,863	5996
117400	50,00	20,40	2,00	3,40	1,40	25,710	0,350	1634	0,700	2927	1,050	3993
117703	50,00	20,40	2,50	3,60	1,10	32,123	0,275	2138	0,550	4070	0,825	5864
118401	50,00	22,40	2,00	3,30	1,30	24,652	0,325	1515	0,650	2747	0,975	3792
014401	50,00	25,40	1,25	2,85	1,60	13,792	0,400	787	0,800	1225	1,200	1430
003023	50,00	22,40	2,50	3,50	1,00	30,800	0,250	1969	0,500	3777	0,750	5478
120103	50,00	25,40	1,50	3,10	1,60	17,168	0,400	1145	0,800	1871	1,200	2317
120400	50,00	25,40	2,00	3,30	1,30	22,878	0,325	1613	0,650	2926	0,975	4039
120801	50,00	25,40	2,50	3,50	1,00	28,582	0,250	2096	0,500	4022	0,750	5834
128599	56,00	28,50	1,50	3,45	1,95	21,495	0,488	1345	0,975	2084	1,463	2419
128600	56,00	28,50	2,00	3,60	1,60	28,646	0,400	1761	0,800	3076	1,200	4093
131 001	60,00	20,50	2,00	4,10	2,10	39,235	0,525	2138	1,050	3507	1,575	4363
003 158	60,00	20,50	2,50	4,05	1,55	49,027	0,388	2239	0,775	4092	1,163	5687
131 801	60,00	25,50	2,50	4,10	1,60	45,471	0,400	2463	0,800	4479	1,200	6196
113 193	60,00	30,50	2,50	4,00	1,50	41,157	0,375	2444	0,750	4488	1,125	6265
138 221	63,00	31,00	1,80	4,10	2,30	33,419	0,575	2086	1,150	3248	1,725	3792
138 503	63,00	31,00	2,50	4,15	1,65	46,389	0,413	2489	0,825	4504	1,238	6202
144 401	70,00	25,50	2,00	4,50	2,50	52,479	0,625	2221	1,250	3478	1,875	4093
146 250	70,00	30,50	2,50	4,70	2,20	61,266	0,550	2984	1,100	5106	1,650	6653
153 014	71,00	36,00	2,00	4,60	2,60	46,249	0,650	2639	1,300	4088	1,950	4744
153 110	71,00	36,00	2,50	4,50	2,00	57,789	0,500	2669	1,000	4662	1,500	6203
159 600	80,00	31,00	2,50	5,30	2,80	84,001	0,700	3393	1,400	5472	2,100	6677
161 220	80,00	41,00	2,25	5,20	2,95	65,586	0,738	3410	1,475	5271	2,213	6099
169 200	90,00	46,00	2,50	5,70	3,20	92,370	0,800	3903	1,600	6073	2,400	7087

Corrosion-resistant SCHNORR® disc springs, material 1.4568 (X7 CrNiAl 17-7)
Ø 31,5 - 90 mm

Article Number/ Order reference	Ordering dimensions					Weight per 1000 pieces [kg]	Spring travel s and force F					
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]		s [mm]	F [N]	s [mm]	F [N]	s [mm]	F [N]
084 150	31,50	16,30	1,75	2,30	0,55	7,800	0,138	997	0,275	1942	0,413	2852
094 210	35,50	18,30	2,00	2,65	0,65	11,400	0,162	1387	0,325	2697	0,487	3956
103 515	40,00	20,40	2,00	2,80	0,80	14,600	0,200	1380	0,400	2648	0,600	3841
104 295	40,00	20,40	2,25	2,95	0,70	16,400	0,175	1655	0,350	3226	0,525	4740
110 601	45,00	22,40	1,75	2,80	1,05	16,500	0,262	1058	0,525	1942	0,787	2711
110 870	45,00	22,40	2,50	3,30	0,80	23,500	0,200	2028	0,400	3946	0,600	5792
120 520	50,00	25,40	2,00	3,15	1,15	22,900	0,287	1395	0,575	2577	0,862	3617
001 889	50,00	25,40	2,50	3,50	1,00	28,600	0,250	2152	0,500	4128	0,750	5988
120 955	50,00	25,40	3,00	3,85	0,85	34,400	0,213	3011	0,425	5892	0,638	8688
128 656	56,00	28,50	2,00	3,40	1,40	28,700	0,350	1472	0,700	2637	1,050	3598
129 025	56,00	28,50	3,00	4,05	1,05	43,000	0,262	3046	0,525	5898	0,787	8621
000 637	63,00	31,00	2,50	3,95	1,45	46,400	0,363	2131	0,725	3932	1,088	5513
153 061	71,00	36,00	2,50	4,25	1,75	57,800	0,438	2231	0,875	3996	1,313	5452
000 136	80,00	41,00	3,00	4,90	1,90	87,400	0,475	3172	0,950	5777	1,425	8005
001 041	90,00	46,00	2,50	5,05	2,55	92,400	0,637	2589	1,275	4277	1,912	5365


Original SCHNORR® bearing preload spring

The optimal supplement for ball bearings

Two problems continually occupy design engineers using bearings, the reduction in noise and the elimination of play in ball bearings. A solution of both these problems has been achieved by Schnorr working in close cooperation with well-known ball bearings manufacturers. The fitting of a special version of our disc springs effectively reduces both problems and frequently results in simpler designs.

Fitting of bearing preload springs

The drawing illustrates how the outer ring of the ball bearing usually is correctly preloaded using a disc spring "K" series. Depending on the requirements of the design, one or more disc springs can be used. In some cases it is preferable to preload the inner ring of the bearing. That is why the bore holes of disc springs for ball bearings were chosen in such a way that they match the internal diameter of another ball bearing size. That way, a disc spring suitable for pushing the external ring of the ball bearing 6302, for example, can also be used to pretension the inner rings of the ball bearings 6205 and 6305.

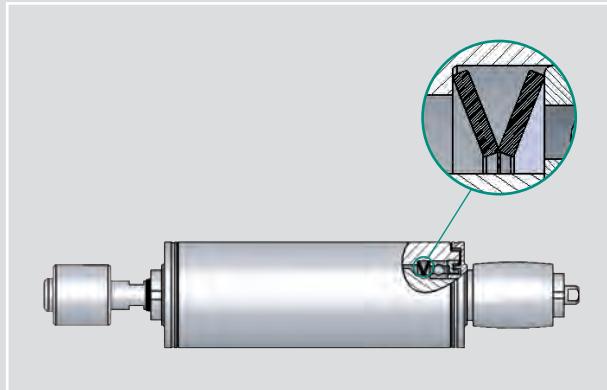

Bearing preload spring

Key advantages speak for bearing preload springs

An important advantage of "K" disc springs is being round. That ensures an equal bearing surface when multiple discs are installed. As with standard disc springs, here it also applies that in alternating arrangement with the constant force the spring deflections add up, while in case of parallel layering (same laying in) with constant spring deflection the loads add up (see figure page 7). As all springs have a strongly digressive spring characteristic (great h_0/t), the spring force continues to be almost constant over a large deflection range.

Apart from the compensation for play, this brings the following advantages:

- The tolerance built up in the assembly can be accommodated without significant change in preload.
- Length variations due to heat impact are absorbed.
- Any subsequent axial movement of the assembly does not alter the preload significantly.




Original SCHNORR® bearing preload springs type "K", non-slotted

How to order

When ordering "K" disc springs to preload the outer ring of the ball bearing please quote the ball bearing size or the article number. In all other cases, please give application details.

Notes on the table

The "K" disc spring sizes listed in the following tables are our standard production and comply with ball bearing series EL, R, 62 and 63. The load and deflections given are at spring deflection of 75 % of the free height h_0 . This is the recommended preload for installation of the "K" disc springs.

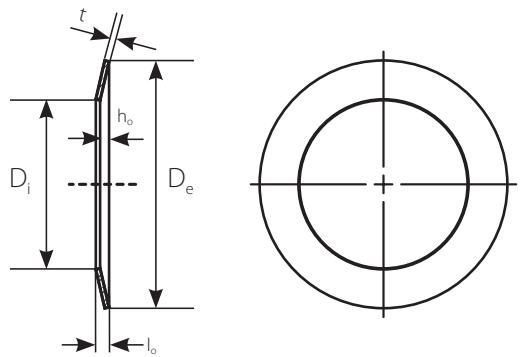

Designation of a disc spring

$D_e = 41,6$ mm, $D_i = 25,5$ mm, $t = 0,5$ mm

Original SCHNORR® bearing preload springs type "K", non-slotted

Ø 9,8 - 119 mm

Article-number/ Order reference	Ordering dimensions				Spring travel s and force F		weight per 1000 pieces [kg]	Ball bearing type		Ball bearing	
	D_e [mm]	D_i [mm]	t [mm]	l_o [mm]	h_o [mm]	h_o/t		s [mm]	F [N]	external dia [mm]	internal dia [mm]
241200	9,80	6,20	0,20	0,40	0,20	1,00	0,15	23	0,07	623 (EL3)	10 3
241 400	12,80	7,20	0,25	0,50	0,25	1,00	0,19	29	0,17	624 (EL4)	13 4
241 600	15,80	8,20	0,25	0,55	0,30	1,20	0,23	23	0,28	625 (EL5) 634 (R4)	16 5 4
241 700	18,80	9,20	0,30	0,65	0,35	1,17	0,26	31	0,49	626 (EL6) 635 (R5)	16 6 5
241 800	18,80	10,20	0,35	0,70	0,35	1,00	0,26	51	0,53	607 (EL7)	19 7
241 900	21,80	12,30	0,35	0,75	0,40	1,14	0,30	46	0,68	608 (EL8) 627 (R7)	22 8 7
242 100	23,70	14,30	0,40	0,90	0,50	1,25	0,38	81	0,86	609 (EL9)	24 9
242 200	25,70	14,30	0,40	0,90	0,50	1,25	0,38	63	1,11	6000 629 (R9)	26 10 9
242 300	27,70	17,30	0,40	1,00	0,60	1,50	0,45	80	1,13	6001	28 12
242 500	29,70	17,40	0,40	1,10	0,70	1,75	0,53	83	1,41	6200	30 10
242 600	31,70	20,40	0,40	1,10	0,70	1,75	0,53	81	1,42	6002 6201	32 15 12
242 800	34,60	20,40	0,40	1,10	0,70	1,75	0,53	61	1,89	6300	35 10
242 900	34,60	22,40	0,50	1,20	0,70	1,40	0,53	118	2,10	6003 6202	35 17 15
243 000	36,60	20,40	0,50	1,30	0,80	1,60	0,60	110	2,81	6301	37 12
243 100	39,60	25,50	0,50	1,30	0,80	1,60	0,60	110	2,78	6203	40 17
243 200	41,60	25,50	0,50	1,40	0,90	1,80	0,68	113	3,28	6004 6302	42 20 15
243 300	46,50	30,50	0,60	1,50	0,90	1,50	0,68	153	4,49	6005 6204 6303	47 25 20 17
243 400	51,50	35,50	0,60	1,50	0,90	1,50	0,68	135	5,06	6205 6304	52 25 20
243 500	54,50	40,50	0,60	1,50	0,90	1,50	0,68	141	4,82	6006	55 30
243 600	61,50	40,50	0,70	1,80	1,10	1,57	0,83	176	9,12	6007 6206 6305	62 35 30 25
243 700	67,50	50,50	0,70	1,70	1,00	1,43	0,75	161	8,51	6008	68 40
243 800	71,50	45,50	0,70	2,10	1,40	2,00	1,05	185	12,99	6306	72 30
243 900	71,50	50,50	0,70	2,10	1,40	2,00	1,05	218	10,90	6207	72 35
244 000	74,50	55,50	0,80	1,90	1,10	1,38	0,83	211	11,99	6009	75 45
244 100	79,50	50,50	0,80	2,30	1,50	1,88	1,13	228	18,40	6307	80 35
244 200	79,50	55,50	0,80	2,30	1,50	1,88	1,13	263	15,78	6010 6208	80 50 40
244 300	84,50	60,50	0,90	2,50	1,60	1,78	1,20	359	19,05	6209	85 45
244 400	89,50	60,50	0,90	2,50	1,60	1,78	1,20	288	23,86	6308	90 40
244 500	89,50	65,50	0,90	2,50	1,60	1,78	1,20	335	20,36	6011 6210	90 55 50
244 600	94,50	75,50	1,00	2,20	1,20	1,20	0,90	325	19,57	6012	95 60
244 700	99,00	65,50	1,00	2,60	1,60	1,60	1,20	292	33,64	6309	100 45
244 800	99,00	70,50	1,00	2,60	1,60	1,60	1,20	332	29,44	6013 6211	100 65 55
244 900	109,00	70,50	1,25	2,70	1,45	1,16	1,09	357	52,80	6310	110 50
245 000	109,00	75,50	1,25	2,70	1,45	1,16	1,09	398	47,17	6014 6212	110 70 60
245 100	114,00	90,50	1,25	2,45	1,20	0,96	0,90	398	36,49	6015	115 75
245 200	119,00	75,50	1,25	2,80	1,55	1,24	1,16	320	64,71	6311	120 55

Original SCHNORR® bearing preload springs type "K", non-slotted											Ø 119 - 358 mm	
Article-number/ Order reference	Ordering dimensions					Spring travel s and force F		weight	Ball bearing type		Ball bearing	
	D _e [mm]	D _i [mm]	t [mm]	l _o [mm]	h _o [mm]	h _o /t	at s ≈ 0,75 h _o [mm]	s [mm]	F [N]	per 1000 pieces [kg]		external dia [mm]
245 300	119,00	85,50	1,25	2,80	1,55	1,24	1,16	393	52,28	6213	120	65
245 400	124,00	90,50	1,25	3,00	1,75	1,40	1,31	445	54,75	6016	6214	125
245 500	129,00	85,50	1,25	3,20	1,95	1,56	1,46	405	71,28	6312	130	60
245 600	129,00	95,50	1,25	3,20	1,95	1,56	1,46	500	57,31	6017	6215	130
245 700	139,00	90,50	1,25	3,25	2,00	1,60	1,50	354	85,11	6313	140	65
245 800	139,00	101,00	1,25	3,25	2,00	1,60	1,50	429	69,58	6018	6216	140
245 900	149,00	95,50	1,50	3,20	1,70	1,13	1,28	379	120,10	6314	150	70
246 000	149,00	106,00	1,50	3,20	1,70	1,13	1,28	450	100,50	6020	6217	150
246 100	159,00	101,00	1,50	3,50	2,00	1,33	1,50	412	138,50	6315	160	75
246 200	159,00	111,00	1,50	3,50	2,00	1,33	1,50	477	118,90	6021	6218	160
246 300	169,00	111,00	1,50	3,80	2,30	1,53	1,73	470	149,20	6316	170	80
246 400	169,00	121,00	1,50	3,80	2,30	1,53	1,73	546	127,70	6022	6219	170
246 500	179,00	121,00	2,00	4,20	2,20	1,10	1,65	864	213,10	6317	180	95
246 600	179,00	126,00	2,00	4,20	2,20	1,10	1,65	928	197,80	6024	6220	180
246 700	189,00	121,00	2,00	4,30	2,30	1,15	1,73	759	258,30	6318	190	90
246 800	189,00	131,00	2,00	4,30	2,30	1,15	1,73	858	227,10	6221	190	105
246 900	198,00	131,00	2,00	4,50	2,50	1,25	1,88	812	270,00	6319	200	95
247 000	198,00	141,00	2,00	4,50	2,50	1,25	1,88	923	236,40	6026	6222	200
247 100	213,00	151,00	2,25	4,50	2,25	1,00	1,69	941	310,90	6224	6320	215
247 200	223,00	161,00	2,25	4,60	2,35	1,04	1,76	942	328,00	6030	6321	225
247 300	228,00	161,00	2,25	4,95	2,70	1,20	2,03	1036	359,20	6226	230	130
247 400	238,00	161,00	2,25	5,25	3,00	1,33	2,25	1021	423,80	6032	6322	240
247 500	248,00	171,00	2,50	5,00	2,50	1,00	1,88	1005	494,50	6228	250	140
247 600	258,00	171,00	2,50	5,50	3,00	1,20	2,25	1106	572,20	6034	6324	260
247 700	268,00	181,00	2,50	5,70	3,20	1,28	2,40	1155	598,70	6230	270	150
247 800	278,00	181,00	2,50	6,00	3,50	1,40	2,63	1155	682,70	6036	6326	280
247 900	288,00	191,00	2,75	5,75	3,00	1,09	2,25	1145	783,70	6038	6232	290
248 000	298,00	191,00	2,75	6,35	3,60	1,31	2,70	1307	883,00	6328	300	140
248 100	308,00	202,00	3,00	6,10	3,10	1,03	2,33	1300	995,20	6040	6234	310
248 200	318,00	212,00	3,00	6,20	3,20	1,07	2,40	1302	1034,00	6236	6330	320
248 300	338,00	232,00	3,00	6,60	3,60	1,20	2,70	1415	1112,00	6044	6238	340
248 400	358,00	242,00	3,00	7,00	4,00	1,33	3,00	1424	1281,00	6048	6240	360


Original SCHNORR® bearing preload springs type "K", with slots

How to order

When ordering these sizes to preload the outer ring of the bearing, please quote the bearing size and the suffix "slotted" or the article number. In all other cases, please give application details.

Slotted version

This special design generates very small loads and accommodates large deflections.

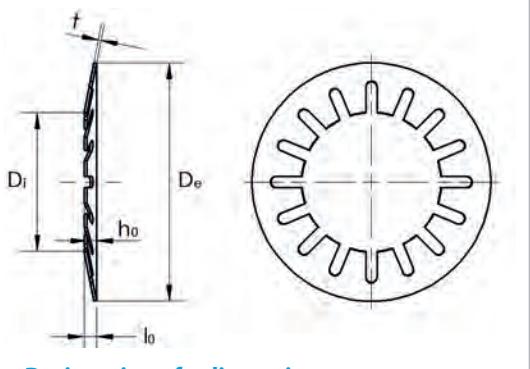

Designation of a disc spring

$D_e = 29,7 \text{ mm}$, $D_i = 17,3 \text{ mm}$, $t = 0,35 \text{ mm}$

Article-number/ Order reference	Ordering dimensions						Spring travel s and force F		weight per 1000 pieces [kg]	Ball bearing type		Ball bearing	
	D_e [mm]	D_i [mm]	t [mm]	l_o [mm]	h_o [mm]	h_o/t	at $s \approx 0,75 h_o$ [mm]	F [N]				external dia [mm]	internal dia [mm]
241 150	9,80	6,20	0,15	0,60	0,45	1,00	0,35	13	0,050	623(EL3)		10	3
241 350	12,80	7,20	0,20	0,65	0,45	0,92	0,35	18	0,130	624(EL4)		13	4
241 650	15,80	8,20	0,25	0,75	0,50	0,74	0,40	20	0,280	625(EL5) 634(R4)		16	5 4
241 675	18,80	9,20	0,25	1,00	0,75	0,97	0,55	20	0,440	626(EL6) 635(R5)		16	6 5
241 750	18,80	10,20	0,25	1,05	0,80	1,15	0,60	24	0,320	607(EL7)		19	7
241 850	21,80	12,30	0,25	1,25	1,00	1,47	0,75	24	0,420	608(EL8) 627(R7)		22	8 7
242 050	23,70	14,30	0,30	1,30	1,00	1,21	0,75	25	0,660	609(EL9)		24	9
242 150	25,70	14,30	0,30	1,40	1,10	1,19	0,80	28	0,700	6000 629(R9)		26	10 9
242 250	27,70	17,30	0,35	1,45	1,10	1,03	0,80	31	0,984	6001		28	12
242 450	29,70	17,30	0,35	1,55	1,20	1,30	0,90	32	1,200	6200		30	10
242 550	31,70	20,40	0,35	1,55	1,20	1,30	0,90	33	1,270	6002 6201		32	15 12
242 750	34,60	20,40	0,40	1,65	1,25	1,10	1,00	32	1,650		6300	35	10
242 850	34,60	22,40	0,35	1,55	1,20	1,18	0,90	32	1,500	6003 6202		35	17 15
242 950	36,60	20,40	0,40	1,90	1,50	1,44	1,10	35	2,280		6301	37	12
243 050	39,60	25,50	0,40	1,90	1,50	1,22	1,10	37	1,920	6203		40	17
243 150	41,60	25,50	0,45	2,05	1,60	1,13	1,20	39	2,500	6004	6302	42	20 15
243 250	46,50	30,50	0,45	2,05	1,60	1,11	1,20	44	2,840	6005 6204	6303	47	25 20 17
243 350	51,50	35,50	0,45	2,10	1,65	1,26	1,25	47	3,070	6205	6304	52	25 20
243 450	54,50	40,50	0,45	2,15	1,70	1,75	1,30	53	3,200	6006		55	30
243 550	61,50	40,50	0,55	2,55	2,00	1,21	1,50	54	6,050	6007 6206	6305	62	35 30 25
243 650	67,50	50,50	0,55	2,60	2,05	1,36	1,60	78	5,500	6008		68	40
243 750	71,50	45,50	0,60	2,90	2,30	1,47	1,70	74	9,600		6306	72	30
243 850	71,50	50,50	0,60	2,90	2,30	1,83	1,70	127	8,200	6207		72	35
243 950	74,50	55,50	0,60	2,90	2,30	1,31	1,70	91	7,580	6009		75	45
244 125	79,50	50,50	0,70	3,10	2,40	1,36	1,80	83	16,260		6307	80	35
244 150	79,50	55,50	0,70	2,90	2,20	1,51	1,65	127	14,500	6010 6208		80	50 40
244 250	84,50	60,50	0,75	3,15	2,40	0,87	1,80	78	13,000	6209		85	45
244 350	89,50	60,50	0,80	3,30	2,50	1,08	1,90	104	18,100		6308	90	40
244 450	89,50	65,50	0,80	3,40	2,60	1,35	1,95	189	16,000	6011 6210		90	55 50
244 550	94,50	75,50	0,80	3,45	2,65	1,39	2,00	206	13,300	6012		95	60

We withstand pressure - or hold it.

For example safety systems in power plants (coal- or gas-fired)



References



Mowing machine



Safety washer



Heavy-duty crane



Safety washer



Motorbike



Safety washer



Photovoltaics



Safety washer

Original SCHNORR® safety washers.

The original SCHNORR® safety washers were developed as a reliable and economic bolt locking device with the basic principle of a disc spring. This ingenious form combines the advantage of security through friction and mechanical locking.

Original SCHNORR® safety washers are now used world wide where secure fastening connections to counter the effect of vibration are required.

Applications are manifold, from automotive engineering to machine, aggregate and plant engineering.

SCHNORR® safety washers are used, for example, in mowing machines, textile machines, machine tools and a lot of other applications..

Die original SCHNORR® safety washer

Offer the following advantages:

- ① High resistance to vibration due to positive locking of the serrations..
- ② Concentrical force transmission and uniform axial load eliminate bending torques and deformation of the bolt stem..
- ③ The design of the serrations prevents friction and damage to components when tightening.
- ④ Extremely high safety against loss of pretension force and loosening.
- ⑤ Wide variety for materials and different finishes.
- ⑥ The closed ring form results in high degree of pretensioning, while avoiding burst-open effect.
- ⑦ Development and design of the washers take place on the basis of the screw geometrics, tightening torque as well as the constructive circumstances..




The original SCHNORR® safety washers are in the form of a disc spring but with a trapezoidal cross-section and serrations on both sides. The outer diameter is matched to the head diameter of the pan head and socket head cap screws.

SCHNORR® safety washers are available in two versions:

The standard safety washer type "S" is available for screws of sizes M1.6 to M36 and of the property classes up to 8.8.

For screws of property classes 8.8 and 10.9, higher pretension forces might be necessary. These are covered by our reinforced washers type "VS".


Due to the conical form, optimal traction is achieved at highest positive locking due to the helical gearing.

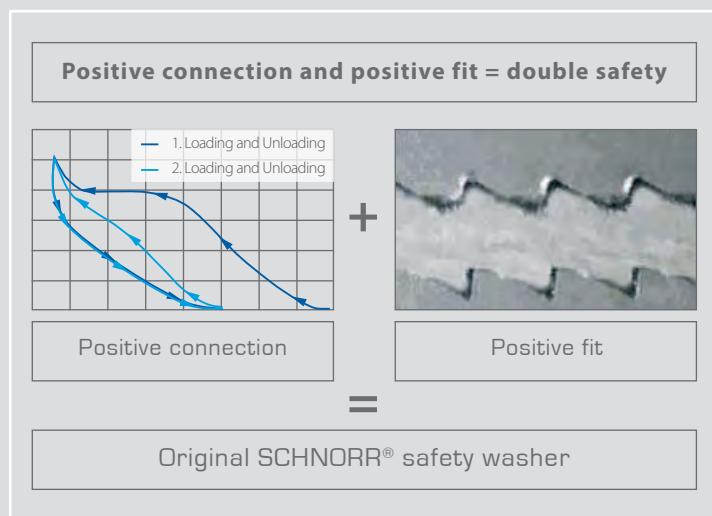

Vibration test according to DIN 65151

Vibration test according to DIN 65151

($F_{v,0,2\%-\text{minimum yield point}} = 37,1 \text{ kN}$)

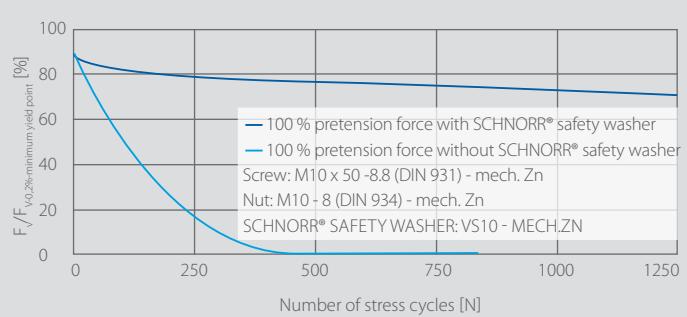

Extensive test series carried out at independent public material research laboratories prove that the original SCHNORR® safety washer brings about a clear improvement of the safety properties

Conclusions


- Connections secured using a SCHNORR® safety washer maintains the pretension force also after 1,500 cycles.
- An unsecured screw connection has lost its pretension already after less than 500 cycles.

Original SCHNORR® safety washer type „S“

The Original SCHNORR® safety washer „S“ is suitable for normal requirements and available for bolt sizes from M 1,6 to M 36 in grades up to 8.8. Please enquire should you require an item with different dimensions, material or surface treatment.

Explanations on the table:

Article-no.:	applies to the normal version made of spring steel, hardened, blackened; mechanically plate
h max.:	maximum dimension as delivered
h min.:	minimum dimension after load test
Available material gr.:	spring steel acc. to DIN EN 10132-4; corrosion-resistant steel 1.4301; Phosphorus Bronze CuSn8; nickel cobalt alloy; creep-resistant steel 1.4122; Inconel
Surface treatments:	blackened (standard), bronzed, phosphated, zinc-coated, zinc lamellar coatings

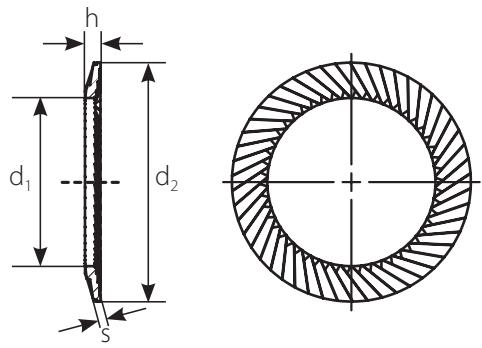

Sketch of an original SCHNORR® safety washer type "S":

Size 8 made of spring steel = safety washer S 8 FSt.

Original SCHNORR® safety washers type "S" material C60S (1.1211)

Article-number/ Order reference	Finish	Size		Ordering dimensions					Packaging	
		Nominal size [mm]	[Inch]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]	Unit [pcs.]	Weight per 1000 pieces [kg]
402 300	blackened	1,6		1,7	3,2	0,35	0,4	0,6	2000	0,014
450 000	Gal.Zn8 + passivation									
404 400	blackened	2,0		2,2	4,0	0,35	0,40	0,6	2000	0,022
450 100	Gal.Zn8 + passivation									
406 800	blackened	2,5		2,7	4,8	0,45	0,50	0,9	2000	0,040
450 200	Gal.Zn8 + passivation									
409 400	blackened	3,0	1/8"	3,2	5,5	0,45	0,50	0,9	2000	0,050
450 300	Gal.Zn8 + passivation									
411 200	blackened	3,5		3,7	6,0	0,50	0,55	0,9	2000	0,050
450 400	Gal.Zn8 + passivation									
412 700	blackened	4,0	5/32"	4,3	7,0	0,50	0,55	1,0	1000	0,076
450 500	Zn8M + passivation									
414 500	blackened	5,0	3/16"	5,3	9,0	0,60	0,60	1,1	1000	0,167
450 600	Zn8M + passivation									
416 300	blackened	6,0		6,4	10,0	0,60	0,70	1,2	1000	0,180
450 700	Zn8M + passivation									
418 100	blackened	6,35	1/4"	6,7	9,5	0,60	0,65	1,2	1000	0,135
450 800	Zn8M + passivation									
419 200	blackened	7,0		7,4	12,0	0,70	0,80	1,3	1000	0,325
450 900	Zn8M + passivation									
420 400	blackened	8,0	5/16"	8,4	13,0	0,70	0,90	1,4	1000	0,370
451 000	Zn8M + passivation									
423 000	blackened	10,0	3/8"	10,5	16,0	0,90	1,10	1,6	1000	0,380
451 100	Zn8M + passivation									
425 100	blackened	11,1	7/16"	11,6	15,9	0,90	1,05	1,6	500	0,560
451 200	Zn8M + passivation									
426 200	blackened	12,0		13,0	18,0	1,00	1,15	1,7	500	0,790
451 300	Zn8M + passivation									
427 900	blackened	12,7	1/2"	13,7	19,0	1,00	1,25	1,8	500	0,890
451 400	Zn8M + passivation									
429 100	blackened	14,0		15,0	22,0	1,10	1,35	2,0	500	1,500
451 500	Zn8M + passivation									
430 700	blackened	16,0	5/8"	17,0	24,0	1,20	1,55	2,1	500	1,790
451 600	Zn8M + passivation									

Original SCHNORR® safety washers type "S" material C60S (1.1211)

Article-number/ Order reference	Finish	Size		Ordering dimensions					Packaging	
		Nominal size [mm]	[Inch]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]	Unit [pcs.]	Weight per 1000 pieces [kg]
432 400	blackened	18		19,0	27	1,40	1,75	2,3	250	2,720
451 700	Zn8M + passivation									
433 800	blackened	19	3/4"	20,0	30	1,4	1,90	2,5	250	3,790
451 800	Zn8M + passivation									
435 100	blackened	20		21,0	30	1,4	1,85	2,5	250	3,420
451 900	Zn8M + passivation									
436 600	blackened	22	7/8"	23,0	33	1,4	1,95	2,7	100	4,200
452 000	Zn8M + passivation									
437 900	blackened	24		25,6	36	1,6	2,15	2,9	100	5,480
452 100	Zn8M + passivation									
439 200	blackened	25,4	1"	27,0	38	1,8	2,35	3,1	100	6,770
452 200	Zn8M + passivation									
440 300	blackened	27		28,6	39	1,8	2,35	3,1	100	6,800
452 300	Zn8M + passivation									
441 500	blackened	30	1 1/8"	31,6	45	1,8	2,60	3,6	100	10,000
452 400	Zn8M + passivation									
442 730	blackened	36	1 3/8"	38,0	54	2,5	3,20	4,2	50	21,140
452 500	Zn8M + passivation									

We would be glad to offer you safety washers type "S" with different finish on request.

Our surfaces are Cr 6-free and comply with the EU "Old Car" (2000/53/EG) RoHS-(2002/95/CE) Directive as well as the WEEE Directive (2002/96/EC)

Original SCHNORR® safety washers type "S" material X5CrNi18-10 (1.4301)

Article-number/ Order reference	Size		Ordering dimensions					Packaging	
	Nominal size [mm]	[Inch]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]	Unit [pcs.]	Weight per 1000 pieces [kg]
403 221	1,6		1,7	3,2	0,5	0,55	0,75	2000	0,016
405 420	2		2,2	4,0	0,5	0,55	0,75	2000	0,032
407 660	2,5		2,7	4,8	0,5	0,55	0,95	2000	0,039
410 750	3	1/8"	3,2	5,5	0,5	0,55	0,95	2000	0,046
412 500	3,5		3,7	6,0	0,7	0,75	1,15	2000	0,082
414 200	4	5/32"	4,3	7,0	0,7	0,75	1,20	1000	0,102
416 100	5	3/16"	5,3	9,0	0,7	0,75	1,20	1000	0,196
417 900	6		6,4	10,0	0,7	0,75	1,20	1000	0,220
418 104	6,35	1/4"	6,7	9,5	0,7	0,75	1,20	1000	0,155
422 700	8	5/16"	8,4	13,0	1,0	1,20	1,60	1000	0,530
424 900	10	3/8"	10,5	16,0	1,0	1,10	1,60	1000	0,760
425 110	11,1	7/16"	11,6	15,9	1,3	1,30	1,85	500	0,890
427 600	12		13,0	18,0	1,3	1,30	1,85	500	1,250
428 950	12,7	1/2"	13,7	19,0	1,3	1,40	1,95	500	1,120
430 500	14		15,0	22,0	1,5	1,65	2,30	500	1,950
432 200	16	5/8"	17,0	24,0	1,5	1,75	2,30	500	2,250
433 650	18		19,0	27,0	1,8	2,05	2,60	250	3,700
433 821	19	3/4"	20,0	30,0	1,8	2,20	2,60	250	4,730
436 400	20		21,0	30,0	1,8	2,15	2,80	250	4,500
437 810	22	7/8"	23,0	33,0	1,8	2,30	3,00	100	5,350
439 091	24		25,6	36,0	2,0	2,35	3,10	100	6,760
439 170	25,4	1"	27,0	38,0	2,5	2,85	3,60	100	10,570
441 410	27		28,6	39,0	2,5	2,85	3,60	100	9,500
442 711	30	1 1/8"	31,6	45,0	2,5	3,10	4,10	100	14,490
442 790	36	1 3/8"	38,0	54,0	3,0	3,70	4,70	100	26,440


We would be glad to offer you safety washers type "S" in further special material grades on request.

Original SCHNORR® safety washers type „VS“

The Original SCHNORR® Safety Washer "VS" can be used with high-strength bolts of the grade 10.9 without any restrictions. This very strong safety washer has a greater thickness for higher pre-tensioning loads. The outside and inside diameters as well as the serrations are the same as the "S" type. It can be delivered for screws M 5 to M 30. Special sizes, materials and surfaces are also available upon request.

Explanations on the table:

Article-no.:	applies to the normal version made of spring steel, hardened, blackened; mechanically plated
h max.:	maximum dimension in delivery condition
h min.:	minimum dimension after load test
Available material grad.:	spring steel acc. to DIN EN 10132-4; corrosion-resistant steel 1.4301; Phosphorus Bronze CuSn8; nickel cobalt alloy, creep-resistant steel 1.4122; Inconel
Available surfaces:	blackened (standard), bronzed, phosphated, zinc-coated, zinc lamellar coatings

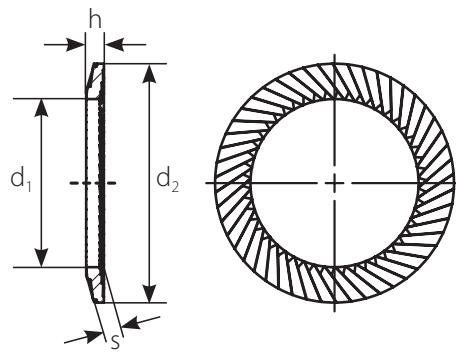

Designation of an original SCHNORR® safety washer type "VS":

Size 16 made of spring steel, surface mechanically plated
= safety washer VS 16 FSt. for 8 M + passivation

Original SCHNORR® safety washers type "VS" material C60S (1.1211)

Article-number/ Order reference	Finish	Size		Ordering dimensions					Packaging	
		Nominal size [mm]	[Inch]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]	Unit [pcs.]	Weight per 1000 pieces [kg]
414 600	blackened	5	3/16"	5,3	9,0	0,9	0,95	1,3	1000	0,260
450 650	Zn8M + passivation									
416 400	blackened	6		6,4	10,0	0,9	0,95	1,4	1000	0,277
450 750	Zn8M + passivation									
420 500	blackened	8	5/16"	8,4	13,0	1,1	1,15	1,7	1000	0,570
451 050	Zn8M + passivation									
423 100	blackened	10	3/8"	10,5	16,0	1,4	1,50	2,0	1000	1,038
451 150	Zn8M + passivation									
426 300	blackened	12		13,0	18,0	1,4	1,55	2,1	500	1,100
451 350	Zn8M + passivation									
429 200	blackened	14		15,0	22,0	1,4	1,65	2,2	500	1,920
451 550	Zn8M + passivation									
430 800	blackened	16	5/8"	17,0	24,0	1,9	2,05	2,6	250	2,800
451 650	Zn8M + passivation									
432 500	blackened	18		19,0	27,0	1,9	2,15	2,7	250	4,100
451 750	Zn8M + passivation									
435 300	blackened	20		21,0	30,0	1,9	2,10	2,8	250	4,571
451 950	Zn8M + passivation									
436 700	blackened	22	7/8"	23,0	33,0	1,9	2,30	3,0	100	5,650
452 050	Zn8M + passivation									
438 000	blackened	24		25,6	36,0	2,4	2,70	3,4	100	8,250
452 150	Zn8M + passivation									
400 974	blackened	25,4	1"	27,0	38,0	2,4	2,95	3,4	100	9,050
401 260	Zn8M + passivation									
440 400	blackened	27		28,6	39,0	2,4	2,80	3,5	100	8,940
452 350	Zn8M + passivation									
441 600	blackened	30	1 1/8"	31,6	45,0	2,4	3,05	3,8	100	13,420
452 450	Zn8M + passivation									
442 801	blackened	36	1 3/8"	38,0	54,0	3,0	3,75	4,5	50	26,500
401 051	Zn8M + passivation									

We would be glad to offer you safety washers type "VS" with different finish on request.


Our surfaces are Cr 6-free and comply with the EU "Old Car" (2000/53/EG) RoHS-(2002/95/CE) Directive as well as the WEEE Directive (2002/96/EC)

Original SCHNORR® safety washers type "VS" material X5CrNi18-10 (1.4301)

Article-number/ Order reference	Size		Ordering dimensions					Packaging	
	Nominal size		d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]	Unit [pcs.]	Weight per 1000 pieces [kg]
416 201	5	3/16"	5,3	9,0	1,0	1,05	1,3	1000	0,270
418001	6		6,4	10,0	1,0	1,10	1,4	1000	0,295
422 901	8	5/16"	8,4	13,0	1,5	1,60	2,0	1000	0,730
425 020	10	3/8"	10,5	16,0	1,8	1,90	2,3	1000	1,400
427 700	12		13,0	18,0	1,8	1,90	2,4	500	1,340
430 660	14		15,0	22,0	1,8	1,95	2,5	500	2,740
430 750	16	5/8"	17,0	24,0	2,5	2,60	3,1	250	3,800
433 621	18		19,0	27,0	2,5	2,65	3,2	250	5,390
435 250	20		21,0	30,0	2,5	2,70	3,3	250	6,250
436 721	22		23,0	33,0	2,5	2,70	3,4	100	7,750
438 021	24		25,6	36,0	3,0	3,20	3,9	100	10,300
441 420	27		28,6	39,0	3,0	3,30	4,0	100	12,360
441 621	30	1 1/8"	31,6	45,0	3,0	3,55	4,3	100	18,250

We would be glad to offer you safety washers type "VS" in further special material grades on request.

Vibration test according to DIN 65151

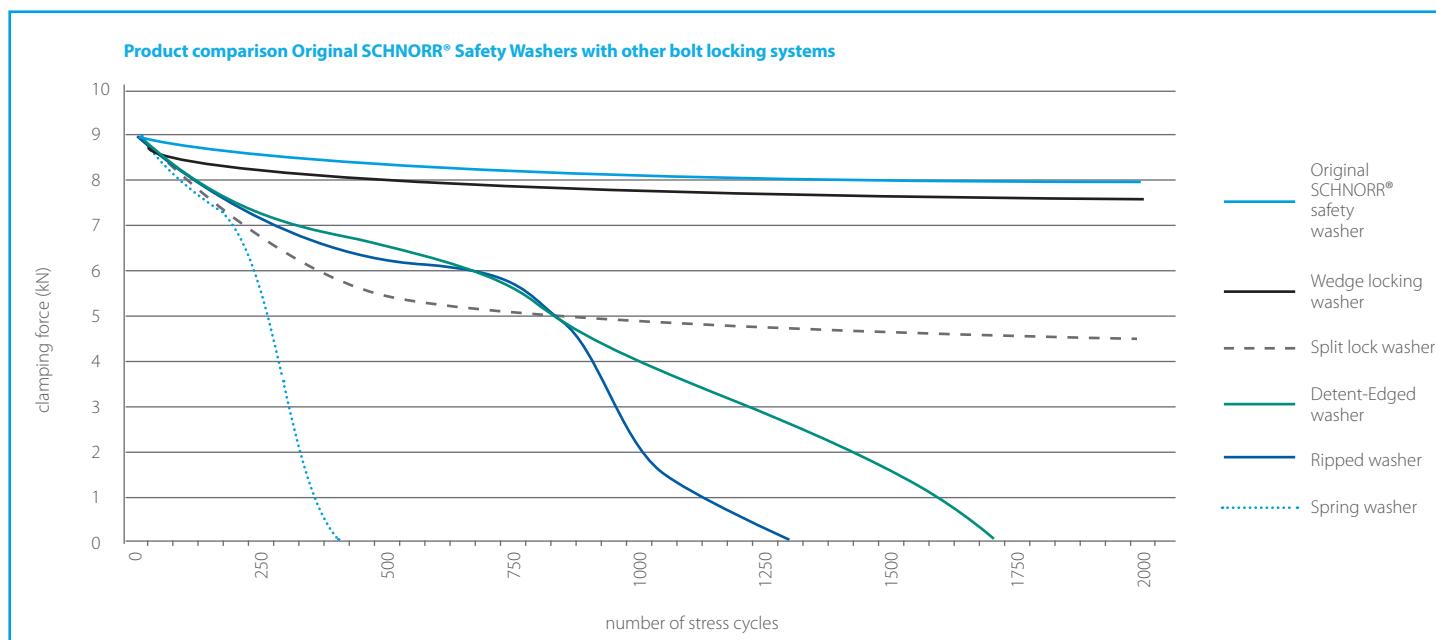

Original SCHNORR® safety washers

„UV“ captive fitting on bolts

For screws with captive safety washers

These safety washers are dimensioned so they can be fitted to bolts or screws from M2.5 to M10. This is done prior to thread rolling so the safety washers are captive.



Original SCHNORR® load washers acc. to DIN 6796

These SCHNORR® load washers have been specially developed for high-strength bolts of grades 8.8 - 10.9. This represents the most powerful form of safety washer in the form of a disc spring. The load of the washers have been matched to these bolts and are 70 to 90% of the bolt load in the flat state.

These load washers conform to DIN 6796, edition Oct. 1987, and are designed for high demands on the protection of bolt joints. As a highly progressive load increase occurs at the end of the spring deflection when the load washer is flattened the load has been indicated as double the calculated value. Tests have shown that these values are comparable with the measured values.

For the protection of bolted joints only that load is available which remains after the load washer has initially set. The table indicates the respective minimum height after the initial loading of the washer. Thus the maximum loss of height due to setting is limited.

Particular advantages of the SCHNORR® load washer:

- ① High axial load
- ② Optimum compensation for setting in the joint
- ③ Reduction of the dynamic loading of the screw.
- ④ Uniform concentric loading and high safety through a high degree of spring action
- ⑤ Suitable for captive fitting on a wide range of bolts (combi bolts)

Explanations on the table:


Technical requirements: according to DIN 267, Part 26
Available material grad.: spring steel acc. to DIN EN 10132-4, other materials on request

Available surfaces: hardened, blank and oiled; mechanically plated; other materials on request
Article-no.: applies to the normal version made of spring steel

h max.: maximum dimension in delivery condition
h min.: minimum dimension after setting test according to DIN 267, Part 26

Contact force: contact forces for the setting test according to DIN 267, Part 26

Min. residual spring load: spring load, which rests after load with the contact pressure acc. to DIN 267, Part 26 and subsequent relieving of 20 µm

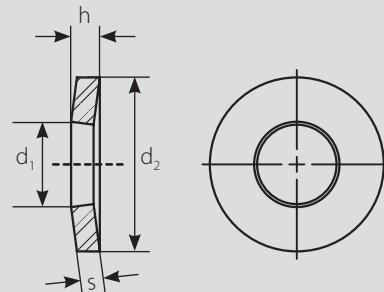

Designation of an original SCHNORR® load washer DIN 6796:

Size 8 made of spring steel
= load washer DIN 6796-8 FSt.

Original SCHNORR® load washers acc. to DIN 6796 material C60 S (1.1211)											
Article-number/ Ordering reference	Finish	Size	Ordering dimensions					Contact force	Minimum residual spring load	Packaging	
			Nominal size [mm]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max} [mm]	F [N]	F [N]	Unit (pcs.)
700 000	blank, oiled										
702 110	Zn12M + passivation	2	2,2	5	0,4	0,5	0,60	920	180	-	0,05
700 100	blank, oiled										
702 120	Zn12M + passivation	2,5	2,7	6	0,5	0,6	0,72	1540	350	-	0,089
700 200	blank, oiled										
702 130	Zn12M + passivation	3	3,2	7	0,6	0,7	0,85	2350	600	-	0,143
700 300	blank, oiled										
702 140	Zn12M + passivation	3,5	3,7	8	0,8	0,9	1,06	3160	1000	-	0,248
700 400	blank, oiled										
702 150	Zn12M + passivation	4	4,3	9	1,0	1,1	1,30	4400	1400	-	0,385
700 500	blank, oiled										
702 160	Zn12M + passivation	5	5,3	11	1,2	1,3	1,55	7200	2300	2500	0,687
700 600	blank, oiled										
702 170	Zn12M + passivation	6	6,4	14	1,5	1,7	2,00	10200	4200	2500	1,434
700 700	blank, oiled										
702 180	Zn12M + passivation	7	7,4	17	1,75	2,0	2,30	14800	6200	1000	2,527
700 800	blank, oiled										
702 190	Zn12M + passivation	8	8,4	18	2,0	2,2	2,60	18600	7700	500	2,993
700 900	blank, oiled										
702 200	Zn12M + passivation	10	10,5	23	2,5	2,8	3,20	29600	12400	250	6,201
701 000	blank, oiled										
702 210	Zn12M + passivation	12	13,0	29	3,0	3,4	3,95	43000	18000	250	12,05
701 100	blank, oiled										
702 220	Zn12M + passivation	14	15,0	35	3,5	4,0	4,65	59100	25000	100	21,58
701 200	blank, oiled										
702 230	Zn12M + passivation	16	17,0	39	4,0	4,6	5,25	80900	34000	100	29,61
701 300	blank, oiled										
702 240	Zn12M + passivation	18	19,0	42	4,5	5,1	5,80	102000	57000	100	37,93
701 400	blank, oiled										
702 250	Zn12M + passivation	20	21,0	45	5,0	5,6	6,40	130000	73000	50	47,63
701 500	blank, oiled										
702 260	Zn12M + passivation	22	23,0	49	5,5	6,1	7,05	162000	91000	25	62,04
701 600	blank, oiled										
702 270	Zn12M + passivation	24	25,0	56	6,0	6,8	7,75	188000	122000	20	90,88
701 700	blank, oiled										
702 280	Zn12M + passivation	27	28,0	60	6,5	7,3	8,35	246000	161000	20	110,5
701 800	blank, oiled										
702 290	Zn12M + Passivierung	30	31,0	70	7,0	8,0	9,20	300000	196000	-	166,9

We would be glad to offer you load washers according to DIN 6796 in different finish and material grades on request.

* dimensions not listed in DIN 267 part 26

The original SCHNORR® HS-Washer

This bolt locking device is, in principle, a load washer with a smaller outer diameter than those acc. to DIN 6796. A notable feature of these washers is the slightly curved form which provides a progressively increasing characteristic curve. Despite the smaller outside diameter dimensions this makes it possible to achieve the same load as the load washers acc. to DIN 6796. These washers are primarily used when the space available is insufficient for standardised load washers.

Explanations on the table:

Technical requirements: according to DIN 267, Part 26



Available material grades: spring steel acc. to DIN EN 10132-4,
other materials on request

Available surfaces: phosphated and oiled; mechanically plated,
other materials on request

Article no.: applies to the normal version made of spring steel
h max.: maximum dimension in delivery condition
h min.: minimum dimension after setting test according
to DIN 267, Part 26

Contact force: contact forces for the setting test according
to DIN 267, Part 26

**Minimum residual
spring load :** spring load, which rests after load with the contact
pressure acc. to DIN 267, Part 26 and subsequent
relieving of 20 µm



Description of an original SCHNORR® HS-Washer:

Size 12 made of spring steel:
= Safety Washer HS 12 FSt.
phosphated and oiled

Original SCHNORR® HS-Washers material C60 S (1.1211)

Article-number/ Ordering reference	Finish	Size	Ordering dimensions					Contact force	Minimum residual spring load	packaging	
			Nominal size [mm]	d ₁ [mm]	d ₂ [mm]	s [mm]	h _{min.} [mm]	h _{max.} [mm]		Unit piece	Weight per 1000 pieces (kg)
416 320 431 510	Phosphated and oiled Zn20M + passivation	6	6,4	12	1,5	1,64	1,90	10200	4200	1000	0,943
416 520 431 520	Phosphated and oiled Zn20M + passivation	8	8,4	17	2,0	2,10	2,55	18600	7700	500	2,438
423 220 431 530	Phosphated and oiled Zn20M + passivation	10	10,5	21	2,5	2,75	3,15	29600	12400	250	4,915
426 400 431 540	Phosphated and oiled Zn20M + passivation	12	13,0	24	3,0	3,27	3,75	43000	18000	250	7,194
429 320 431 550	Phosphated and oiled Zn20M + passivation	14	15,0	28	3,5	3,80	4,35	59100	25000	100	11,61
430 900 431 560	Phosphated and oiled Zn20M + passivation	16	17,0	30	4,0	4,31	4,95	80900	34000	200	14,5
433 750 431 570	Phosphated and oiled Zn20M + passivation	18	19,0	33	4,5	4,80	5,50	102000	57000	100	19,36
435 320 431 580	Phosphated and oiled Zn20M + passivation	20	21,0	36	5,0	5,30	5,95	130000	73000	50	25,33
436 620 431 590	Phosphated and oiled Zn20M + passivation	22	23,0	40	5,5	5,90	6,70	162000	91000	50	35,07
439 150 431 600	Phosphated and oiled Zn20M + passivation	24	25,0	45	6,0	6,45	7,30	188000	122000	25	50,28
440 100 431 610	Phosphated and oiled Zn20M + passivation	27	28,0	50	6,5	7,00	8,00	246000	161000	20	66,94
442 650 431 620	Phosphated and oiled Zn20M + passivation	30	31,0	58	7,0	7,65	8,90	300000	196000	-	101

We would be glad to offer you safety washers type "HS" with different finish on request.



We act in the
background with
excellent efficiency.

For example, by using special material grades for particular operational demands.

Disc spring engineering

Thoroughly dealing with elaborate customized solutions.

We specialise in developing tailor-made solutions in partnership with our customers; be it in new applications, increasing quality and capacity requirements or specific materials. Our inhouse testing facilities permit sampling or 100% volume inspection according to customer and quality standard requirements.

To facilitate this process we can utilise highly skilled specialists, latest construction tools, FEM-Calculations, specialized manufacturing processes in the appropriate machinery as well as our 100 years of experience.

SCHNORR® provide top quality specialised disc springs from single item to large scale production as well as first class standard products. Our in-house test facilities permit sampling or 100% volume inspection according to customer and quality standard requirements

The fields of application know no bounds.

Only some examples are listed below:

- special springs for bayonet catches
- star springs for very low loads
- springs for damper parts
- special springs for motorsports
- converted spring columns und spring stacks
- springs for pressure limitation
- special springs for clutches
- special springs for torque limiters





Wave Springs

The SCHNORR GmbH is both able to deliver wave springs according to drawings, and to develop wave springs according to customer requirements. Wave springs are wound or stamped parts made of spring steel, which usually are made of flats (can also be made of round material)

Wave springs with static to medium dynamic usage show huge space-saving potential with reductions of installation height up to 50%. Based on the specific geometry and function of the wave spring, it ensues a very low hysteresis in comparison to the use of a disc spring.

For the manufacturing of wave springs a variety of materials is suitable.

The SCHNORR GmbH manufactures wave springs with the dimension range of:

- Thickness: 0,25 – 5,00 mm
- Outer diameter: 5,00 – 250,00 mm
- Inner diameter: 2,00 – 240,00 mm

Only some examples for wave springs are listed below:

- ball bearings
- automatic transmissions
- tensioning devices



stamped parts | deep drawing parts | fine-blanked parts

With our machinery and our expertise in the processing of spring steels, we are able to manufacture any kind of stamped parts made of spring steel as well as other materials according to your requirements.

Furthermore, we develop and manufacture deep drawing and fine blanking parts made of a wide range of materials tailored to your requirements.

Here again SCHNORR® creates high-quality solutions for you!

The fields of application know no bounds. Only some examples are listed below:

- vibration damper
- spring steel cover sheets
- heat shields
- retaining plates
- other stamped parts made of spring steel
- deep drawing parts made of spring steel
- special fine blanked parts
- bar springs





Safety washers

In addition to the standard sizes and standard materials mentioned on page 29 to 32, our engineers and technicians are able to develop safety washers with special dimensions and also special materials in cooperation with you.



Load washers

In addition to the standard sizes and standard materials of the DIN 6796 load washers and the original SCHNORR® HS-Washers mentioned on page 34 to 35, we are able to develop load washers and HS-Washers with special dimensions and special materials according to customer requirements and in close cooperation with our customers



Materials

Standard materials

• C60S (1.1211):

This spring steel is a quality steel according to DIN EN 10132-4. We use this spring steel exclusively for our original SCHNORR® safety washers and load washers according to DIN 6796.

• C67S (1.1231) und C75S (1.1248):

These spring steel grades according to DIN EN 10132-4 are used as cold rolled strip for disc springs of group 1 according to DIN EN 16983 (previously DIN 2093) up to a thickness of $t < 1.25$ mm and for our disc springs of the "K" series.

• 51CrV4 (1.8159):

This chromium-vanadium alloyed spring steel is used in rolled condition (according to DIN 10132-4 or acc. to DIN 10089) for disc springs with a thickness between 1.25 mm to 6 mm. Normally this stainless steel is processed in forged form for disk thicknesses of more than 6 mm.

Materials for special requirements

Corrosive, high temperature and other aggressive environments require the use of materials. These materials, in general, have lower tensile strength than standard materials and should only be specified if absolutely necessary. These springs have a lower overall height than comparable sizes made of standard materials, resulting in lower spring force. This must be taken into consideration when using these materials.

Corrosion-resistant materials

• X10 CrNi 18-8 (1.4310):

This chromium-nickel alloyed steel according to DIN EN 10151 is the most commonly used material for disc springs up to a thickness of $t = 3.0$ mm. Unfortunately, the cold forming process makes it magnetic.

• X7 CrNiAl 17-7 (1.4568):

This steel alloy according to DIN EN 10151 is a precipitation-hardened spring steel which is processed in cold-strained condition up to a thickness of approx. 2.5 mm. The cold forming process makes this material magnetic.

• X5 CrNiMo 17-12-2 (1.4401):

With this steel according to DIN EN 10151, the strength is somewhat less than that of the previous two. However, it offers higher corrosion resistance and lower magnetism. Small amounts of this material are hard to procure, and it is thus rarely used.

High-temperature materials

• X22 CrMoV 12-1 (1.4923):

This chromium-molybdenum-vanadium steel according to DIN EN 10269 that can be quenched and tempered has proved very well for the use of heat-resistant disc springs.

• X39 CrMo 17-1 (1.4122):

This is a chromium-molybdenum alloyed steel according to DIN EN 10088-2 that can be quenched and tempered. This material grade has also proved very well for the use of heat-resistant disc springs.

Please bear in mind that both steel grades mentioned are not considered as corrosion-resistant steel grades.

Anti-magnetic and corrosion-resistant materials

• CuSn 8 (2.1030):

Tin bronze according to DIN EN 1654 is an alloy consisting of copper and tin, maintaining its spring characteristics due to cold forming. Please bear in mind that the strength values and the spring forces resulting from it are considerably lower than with the standard material.

• CuBe 2 (2.1247):

Copper-beryllium according to DIN EN 1654 is an excellent spring material grade which is suitable for extremely low temperatures up to the vicinity of the absolute zero point.

These copper alloys are absolutely anti-magnetic, and they have a very good electric conductivity. Furthermore they show a high corrosion resistance against many media.

Heat-resistant special materials with a very good corrosion resistance

Due to their composition, these nickel-base alloys show an excellent resistance against a lot of media. Unfortunately, they are expensive and often hard to procure. As these material grades are often used under extreme operational conditions, a potential creeping under load might lead to a loss of installation height/loss of force of the disc spring. This creeping is a function of temperature, time and tension. A disc spring can be used at higher temperatures, for example, when either a low load is chosen or the exposure time is accordingly short. Thus a maximum working temperature cannot be stated. The values stated in the material grade overview table can therefore serve as a guiding value only.

• NiCr 20 Co 18 Ti (NIMONIC 90) (2.4632):

This nickel-cobalt alloy shows very good high temperature strength characteristics and can be used for higher temperatures with corresponding dimensioning.

• NiCr 15 Fe 7 TiAl (INCONEL X 750) (2.4669) und NiCr 19

NbMo (INCONEL 718) (2.4668):

These nickel-chromium alloys are virtually cobalt-free and for this reason they are often used in nuclear reactor technology.

Furthermore, we process special material grades within the SCHNORR® plant which are not listed in detail here. In case of any queries in terms of special material grades, please contact our engineering department.

Materials – synoptic table

Short name	AISI ASTM	Material no.	Norm	Chemical composition in percent by weight					
				C	Si	Mn	P max.	S max.	Cr
Steel grades for normal operating demands									
Standard material grade									
C 60S	1060	1.1211	DIN EN 10132-4	0.57...0.65	0.15...0.35	0.60...0.90	0.025	0.025	max. 0.40
C 67S	1070	1.1231	DIN EN 10132-4	0.65...0.73	0.15...0.35	0.60...0.90	0.025	0.025	max. 0.40
C 75S	1078	1.1248	DIN EN 10132-4	0.70...0.80	0.15...0.35	0.60...0.90	0.025	0.025	max. 0.40
51 CrV 4	6150	1.8159	DIN EN 10132-4	0.47...0.55	max. 0.40	0.70...1.10	0.025	0.025	0.90...1.20
Special material grades for particular operating demands									
Corrosion-resistant steel grades									
X 10 CrNi 18-8	301	1.4310	DIN EN 10151	0.05...0.15	max. 2.0	max. 2.0	0.045	0.015	16.0...19.0
X 7 CrNiAl 17-7	631	1.4568	DIN EN 10151	max. 0.09	max. 0.7	max. 1.0	0.040	0.015	16.0...18.0
X 5 CrNiMo 17-12-2	316	1.4401	DIN EN 10151	max. 0.07	max. 1.0	max. 2.0	0.045	0.015	16.5...18.5
X 5 CrNi 18-10	304	1.4301	DIN EN 10151	max. 0.07	max. 1.0	max. 2.0	0.045	0.015	17.5...19.5
Heat-resistant steel grades									
X 22 CrMoV 12-1	-	1.4923	DIN EN 10269	0.18...0.24	max. 0.5	0.40...0.90	0.025	0.015	11.0...12.5
X 39 CrMo 17-1	-	1.4122	DIN EN 10088-1	0.33...0.45	max. 1.0	max. 1.5	0.040	0.03	15.5...17.5
Copper alloys				Sn	P	Be	Ni + Co	Cu	
CuSn 8	-	2.1030	DIN EN 1654	7.5...8.5	0.01...0.4	-	-	Rest	
CuBe 2	-	2.1247	DIN EN 1654	-	-	1.8...2.1	max. 0.3	Rest	
Nickel and cobalt alloys				Ni	Cr	Co	Ti	Al	C
NiCr 20 Co 18 Ti	HEV6	2.4632 / 2.4969	DIN EN 10302	Rest	18.0...21.0	15.0...21.0	2.0...3.0	1.0...2.0	0.13 max
(Nimonic 90)	5829C (AMS)								
NiCr 15 Fe 7 Ti Al	688	2.4669	DIN EN 10302	70.0 min.	14.0...17.0	1.0 max.	2.25...2.75	0.40...1.00	0.08 max.
(Inconel X 750)	5542L (AMS)								
NiCr 19 NbMo	5596J (AMS)	2.4668	DIN EN 10302	50.0...55.0	17.0...21.0	1.0 max.	0.70...1.15	0.3...0.7	0.02...0.08
(Inconel 718)									
Nickel and cobalt alloys (continued)				S	P	B	Nb + Ta	Mo	W
NiCr 20 Co 18 Ti	HEV6	2.4632 / 2.4969		0.015 max.	0.03 max.	0.02 max.	-	-	-
(Nimonic 90)	5829C (AMS)								
NiCr 15 Fe 7 Ti Al	688	2.4669		0.015 max.	0.02 max.	-	0.7...1.2	-	-
(Inconel X 750)	5542L (AMS)								
NiCr 19 NbMo	5596J (AMS)	2.4668		0.015 max.	0.015 max.	0.006 max.	4.8...5.5	2.8...3.3	
(Inconel 718)									

					Physical and mechanical properties			
V	Mo	Ni		N	E module in kN/mm ² at RT	working temperature C°	Thickness range mm	Procurement
-	max. 0.10	max. 0.40			206	-20...+100	0.2...7.0	easy
-	max. 0.10	max. 0.40			206		0.1...2.5	easy
-	max. 0.10	max. 0.40			206	-20...+100	0.1...1.5	easy
0.10...0.25	max. 0.10	max. 0.40			206	-50...+200	0.3...80	easy
-	max. 0.8	6.0...9.5		-	190	-200...+200	0.2...2.5	easy
-	-	6.5...7.8		-	195	-200...+300	0.2...4.0	difficult
-	2.0...2.5	10.0...13.0		max. 0.11	180	-200...+200	0.2...1.6	difficult
-	-	8.0...10.5		max. 0.11	185	-200...+200	0.2...1.6	difficult
0.25...0.35	0.80...1.20	0.30...0.80			216	-50...+500	1.5...20	difficult*
-	0.80...1.30	max. 1.0			215	-50...+400	0.3...6.0	difficult*
					115	-50...+100	0.1...6.0	easy
					135	-260...+200	0.1...2.5	easy
Si	Mn	Fe	Cu	Zr				
1.0 max.	1.0 max.	1.5 max.	0.2 max.	0.15 max.	220	-200...+700	until 6.35	difficult*
0.50 max.	1.0 max.	5.0...9.0	0.5 max.	-	214	-200...+600	until 6.35	difficult*
0.35 max.	0.35 max.	Rest	0.2 max.	-	199	-200...+600	until 6.35	difficult*

With regard to the maximum working temperatures listed it must be taken into consideration that the setting height of the springs depends on the height of the tensions occurring and on the operating time on temperature. Furthermore, it has to be taken into consideration that with increasing temperature of the elasticity module of the material the strength diminishes. The operating temperature and thickness ranges can serve as reference values only. With heat-resistant steel grades, heat treatment and hardness deviate from the information given in the mentioned standards. In case of any queries regarding material grade selection, please contact our engineering department.

* Please note the minimum order quantities for these materials

Surfaces

Surface protection

Disc springs are used in many applications where corrosive media is common. When used in outdoor areas, the spring steel is attacked by condensation, rain, river and sea water.


Further applications can be found in automotive building, the food industry, household appliances (e.g. washing machine), bridge building, the aerospace industry etc.

Besides watery or chloride-containing solutions, acids and leaches in various concentrations get in contact with the disc springs here.

In those cases the standard spring steels do not provide sufficient protection and need specific surface treatment to have suitable protection for the working environments.

The criteria given in the following tables are intended to help you find the surface protection best suited for your applications.

Surfaces in the salt spray test according to DIN EN ISO 9227

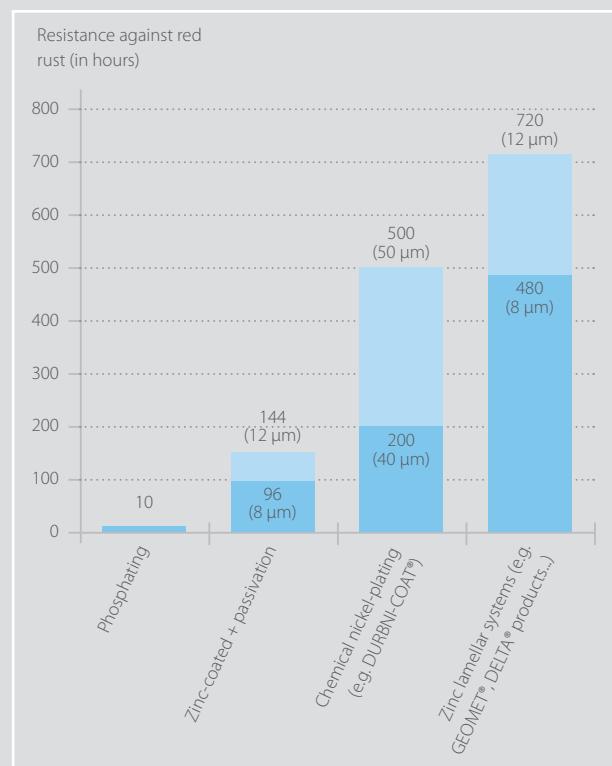

Surface systems**	Layer thickness (µm)	Dimensions (in mm)	Salt spray test DIN 9227 in hours*	Temperature resistance (°C)*	Sea water use	Equal coating	Resistance to atmospheric corrosion	Frictional coefficients adjustable	Domestic standards	Foreign standards	Customer and works standards	
Phosphating	8 - 10	De < 600	10	RT	-	+	-	-	N	DIN EN 12476	DIN EN 12476	BOSCH, MIL, DBL
Zinc-coated + passivation	8 - 12	Ø 10-125 problematic: < Ø 10 and very thin disc springs	96 - 144	150	-	-	o	o	J	DIN EN ISO 12683, DIN 50961	ASTM B 695-04, DIN EN ISO 12683	
Chemical nickel-plating	40 - 50	De < 1000	200 - 500	155	-	+	o	o	J	DIN EN ISO 4527	DIN EN ISO 4527	
Zinc lamellar systems	8 - 10	De < 1000 problematic: < Ø 10 and very thin disc springs	480 - 720	250 - 300	+	+	+	+	J	DIN EN ISO 10683	DIN EN ISO 10683, ASTM F 1136, MIL, DIN EN 13858	All common automotive standards VDA 235-104

good (+); medium (o); poor (-)

* In case of extreme demands on resistance, we offer the relevant corrosion-resistant material grades.

** We would be glad to offer you further surfaces on request. Please contact our engineering department.



Tightening torques for Original SCHNORR® Safety Washers

Table is valid for

Shank bolts with metric standard thread acc. to DIN ISO 262

- Head dimensions of hexagonal bolts acc. to DIN EN ISO 4014 to 4018
- Hexalobular external driving head bolts acc. to DIN 34800
- Cylindrical bolts acc. to DIN EN ISO 4762 and hole "medium" acc. to DIN EN 20273"

To reach the same initial force when using a SCHNORR safety washer type "S", the initial torque has to be higher (+10%) than for a bolt without a securing device (see table)

The same applies to SCHNORR safety washers type "VS".

For more detailed information concerning assembly preload and tightening torque please see also VDI 2230

Nominal size	Tightening torque (Nm)	
	Strength grade	
	8,8	10,9
M 4	3,6	5,3
M 5	7,2	10,5
M 6	12,4	18,2
M 7	20,6	30,3
M 8	30,0	44,1
M 10	59,4	86,9
M 12	102,3	150,7
M 14	162,8	239,8
M 16	253,0	371,8
M 18	361,9	515,9
M 20	510,4	727,1
M 22	697,4	994,4
M 24	877,8	1249,6
M 27	1293,6	1841,4
M 30	1756,7	2501,4
M 33	2377,1	3385,8
M 36	3055,8	4352,7

All specifications are valid for Original SCHNORR® Safety Washers made of C60S (1.1211) and are non-binding approximate values.

notice pad

SCHNORR®
DISC SPRING ENGINEERING

Disc Spring enquiry sheet

1. Application:

2. Purpose of the springs:

Single spring Spring stack [____ set(s) per | ____ spring(s) in parallel]

3. Dimension of the disc spring (minimum und maximum):


Outside diameter D_e = mm

Inside diameter D_i = mm

Thickness t = mm

Reduced thickness t' = mm

Overall height l_o = mm

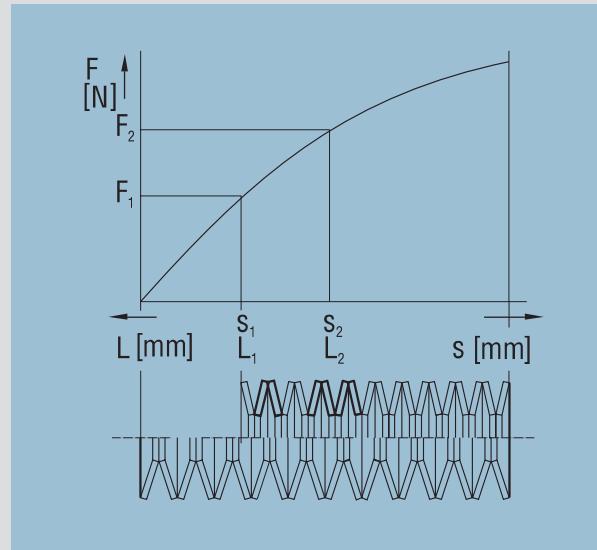

4. Installation space (max. De, min. Di and max. length):

Outside diameter D_e = mm

Inside diameter D_i = mm

Length L = mm

5. Loads and deflection:

installed length

L_1 = mm

L_2 = mm

L_3 = mm

Spring deflection

s_1 = mm

s_2 = mm

s_3 = mm

Spring force

F_1 = mm

F_2 = mm

F_3 = mm

upstroke Δs (L_1-L_n)

L_1-L_2 = mm

L_1-L_3 = mm

6. Type of load

static dynamic

7. Form of load

impact sinusoidal

8. Number of cycles required:

9. Working temperature (at the springs): °C

10. Guidebar inner outer

11. Position of the spring stack vertical horizontal

12. Is corrosion protection necessary? no yes

13. Aggressive medium:

14. Remarks:


15. Estimated annual usage:

contact name:


phone:

Email:


signature and official company stamp

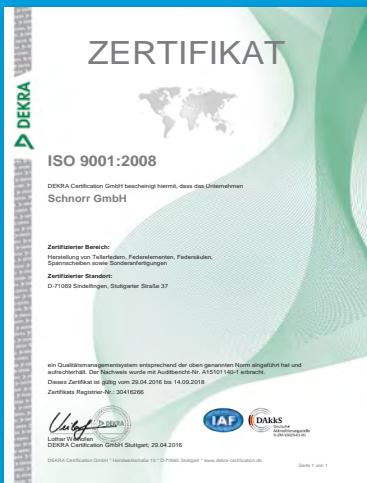

certified according to
ISO 9001-2008

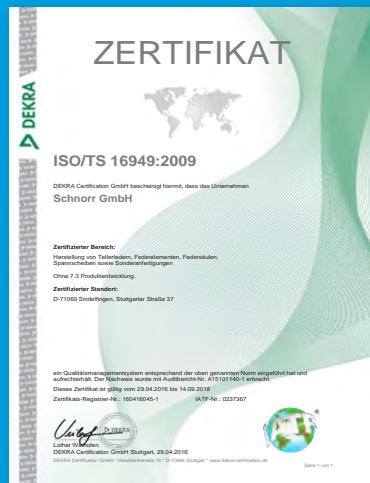

certified according to
ISO/TS 16949:2009

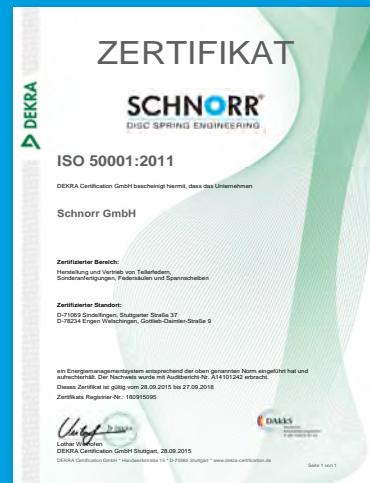

certified according to
ISO 50001:2011



SCHNORR GmbH
P.O. Box 60 01 62
71050 Sindelfingen, Germany
Stuttgarter Straße 37
71069 Sindelfingen, Germany
Phone: +49 (0)7031 302-0
Fax: +49 (0)7031 38 26 00
mail@schnorr.de
www.schnorr.de

SCHNORR®
DISC SPRING ENGINEERING